

SmartLine

RMA801 SmartLine Remote DE or Analog Indicator Specification

34-ST-03-148, September 2022



Introduction

The Honeywell RMA801 is a DE or analog remote indicator suitable for use with any DE transmitter or a transmitter operating in analog, 4-20 mA mode. The RMA801 is part to the RMA 800 family and delivers the ability to locate a remote indicator away from a SmartLine transmitter. In this specific instance, the RMA801 is the remote display offering that supports Honeywell's DE protocol and thus it connects to the SmartLine family of transmitters when using DE protocol. Besides supporting DE protocol, the RMA801 is also capable of operating in analog only mode allowing it to connect to any transmitter with a 4-20 mA output including HART protocol transmitters.

Best in Class Features:

- RMA auto-configuration when connected to DE protocol transmitters
- Modular design hardware
- Dual compartment housing separating sensitive electronics from termination wiring
- Standard and custom measurement units available
- Integrated two configuration buttons
- Simple, easy to use interface
- Remote indicator diagnostic displays
- Reverse wiring polarity protection
- Functions as a second, remotely-located display for ease of view

Integral Keypad

The RMA801 features a built-in 2-button keypad on display, permitting display set-up and operation, including:

- RMA configuration for LRV, URV and engineering unit
- RMA calibration
- Display appearance (contrast setting)



Figure 1–RMA801 Remote Indicator

Display Characteristics

The RMA801 Remote Indicator features the following:

- 360° rotation in 90° Increments
- 2 lines, 8 characters
- Diagnostic messaging
- Custom units of measurement
- Standard units of measurement:

Temperature	°C, °F, °R, K, mV, Ohm
Pressure	inH2O@39°F, mH2O@4°C, cmH2O@4°C, Torr, mmH2O@68°F, ftH2O@68°F, inH2O@68°F, inH2O@60°F, atm, Pa, kPa, MPa, gf/cm2, kgf/cm2, psi, mbar, bar, inHg@0°C, mmHg@0°C, mmH2O@4°C.
Flow	ft3/sec, gal/min, gal/hr, liter/min, liter/hr, m3/sec, m3/hr, Pounds per sec(lbm/sec), Pounds per min (lbm/min), Pounds per hr(lbm/hr), kg/sec, kg/hr, Standard Cubic Feet per min (SFt3/m), Standard Cubic Feet per hr (SFt3/h), Standard Cubic Feet per Day (SFt3/d), Metric Standard Cubic Feet per Hour(MSCFH), Normal Cubic meter per hr(NM3/h), Million Standard Cubic Feet per Day (MMSCFD), Million Standard Cubic Feet per Hour (MMSCFH)
Level	ft, in, m, cm, mm, %

Display Screens & Diagnostics

Similar to all other SmartLine products, the display rotation and contrast settings are user configurable.

The RMA801 remote indicator can rotate the display in 90 deg and cover 360 deg manually

Diagnostic messages



BAD-Tx

Transmitter critical diagnostic condition present



BAD-RMA

RMA diagnostics present



RMA DG

RMA Diagnostics

Figure 2: Standard Display screens

Specifications

Operating Conditions						
Parameter	Reference Condition		Operative Limits		Transportation and Storage	
	°C	°F	°C	°F	°C	°F
Ambient Temperature	25±1	77±2	-40 to 70*	-40 to 158	-30 to 80	-22 to 175
Humidity (%RH)	10 to 55		0 to 100		0 to 100	

Note: LCD display operating temperature is -20 to 70°C. At temperatures beyond this operating limit, display may not be readable but loop will remain intact.

Physical/Functional Specifications	
Parameter	Description
Input Signal	4-20 mA DC
Max Voltage drop	2.3V @ 21.5mA
Drop under Failure conditions	5.6V
Min loop operating current	3.6mA
Vibration:	IEC 60770-1 field or pipeline, vibration (10-2000 Hz: 0.21mm displacement / 3g max acceleration)
Electromagnetic Compatibility	IEC 61326-3-1
Electronic Housing	Pure Polyester Powder Coated Low Copper (<0.4%) Aluminum. Meets NEMA 4X, IP66, IP67 and NEMA 7 (explosion proof). All stainless steel housing is optional. Cover o-ring material: Silicone
Wiring	Accepts up to 16 AWG (1.5 mm diameter).
Mounting Bracket	Carbon Steel (zinc-chromate plated) or 316 Stainless Steel. Suitable for wall or 2" (50mm) vertical or horizontal pipe mounting.
Electrical Connections	½"-14 NPT or M20
Dimensions	See Figure 3 and Figure 5
Net Weight	2.5 lbs (1,1 kg) with aluminum housing

Performance	
Parameter	Description
Accuracy: - Analog 4-20 mA Mode - Temperature Effect - DE	+/- 0.1% of Span under standard conditions +/- 0.01 % of Span under standard conditions Same as transmitter*
Display	Digital Readout: 7 digits,
Display Resolution	0.01 unit for reading range (-999 to 999) 0.1 unit for reading range (-9999 to -1000) or (1000 unit to 9999). 1 unit for reading range (-99999 to -10000) or (10000 to 99999). 10 units for reading range (-999999 to -100000) or (100000 to 999999).

*Reproduces the transmitter signal exactly to within its resolution

Reference Dimensions: $\frac{\text{millimeters}}{\text{inches}}$



Mounting & Dimensional Drawings

TRANSMITTER ENCLOSURE CAN BE ROTATED A TOTAL OF 90° FROM THE STANDARD MOUNTING POSITION

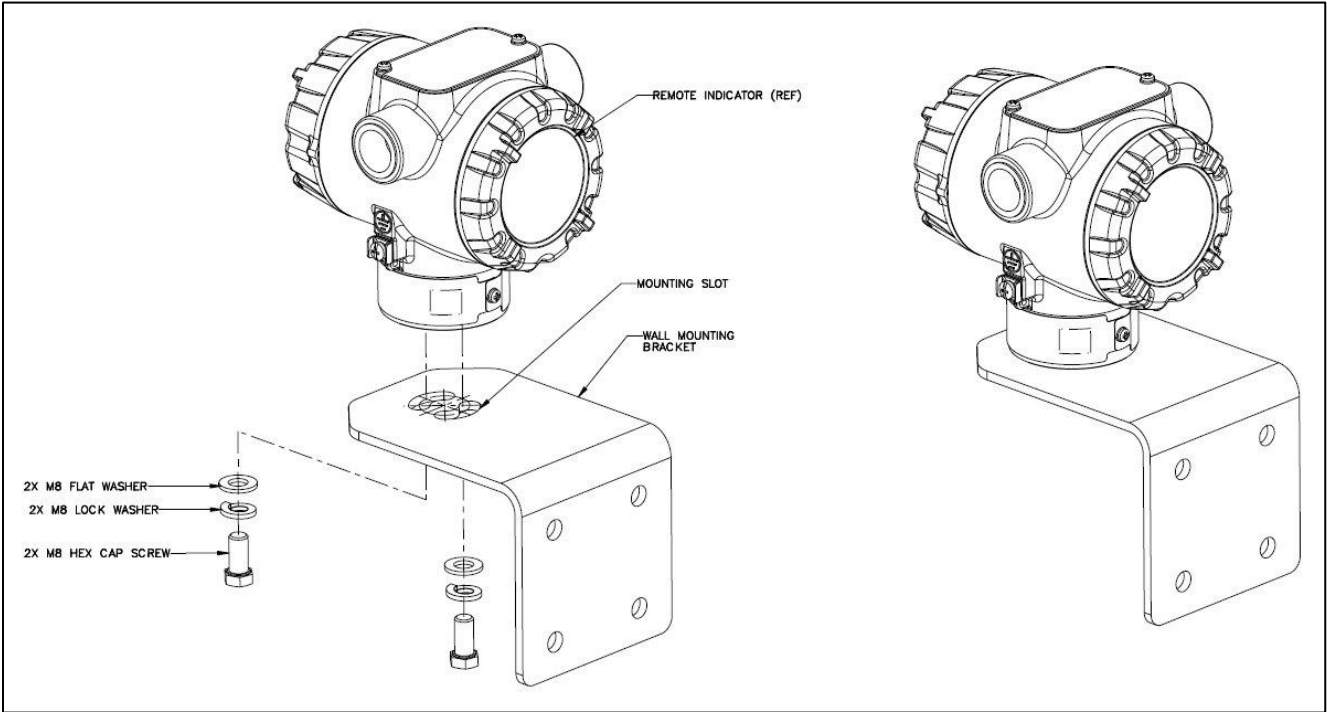


Figure 4 - Wall Mounting

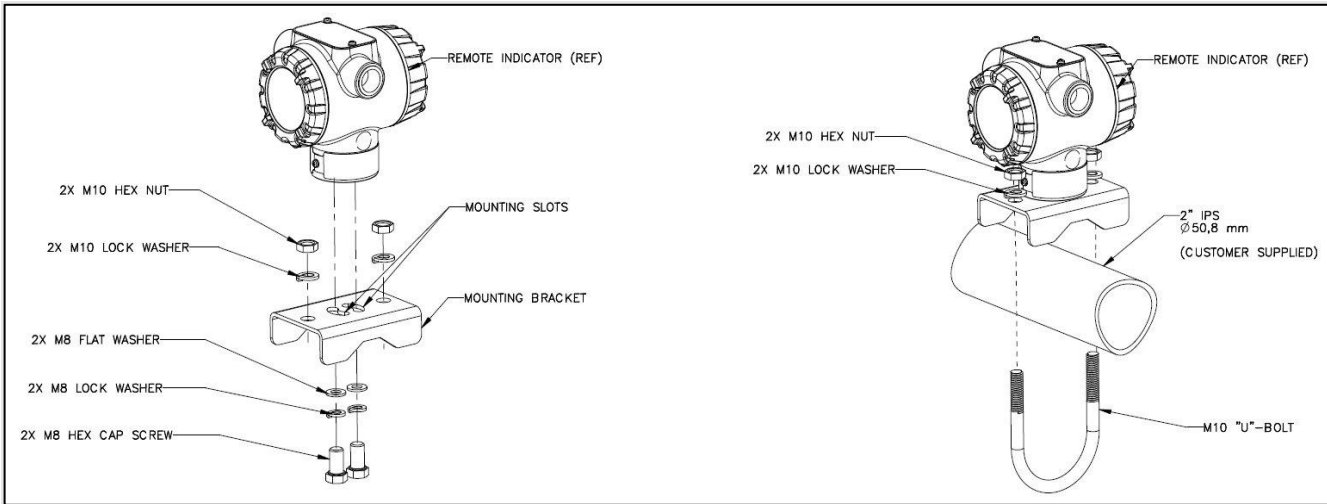


Figure 5 – Pipe Mount, Horizontal & Vertical

Mounting & Dimensional Drawings

TRANSMITTER ENCLOSURE CAN BE ROTATED A TOTAL OF 90° FROM THE STANDARD MOUNTING POSITION

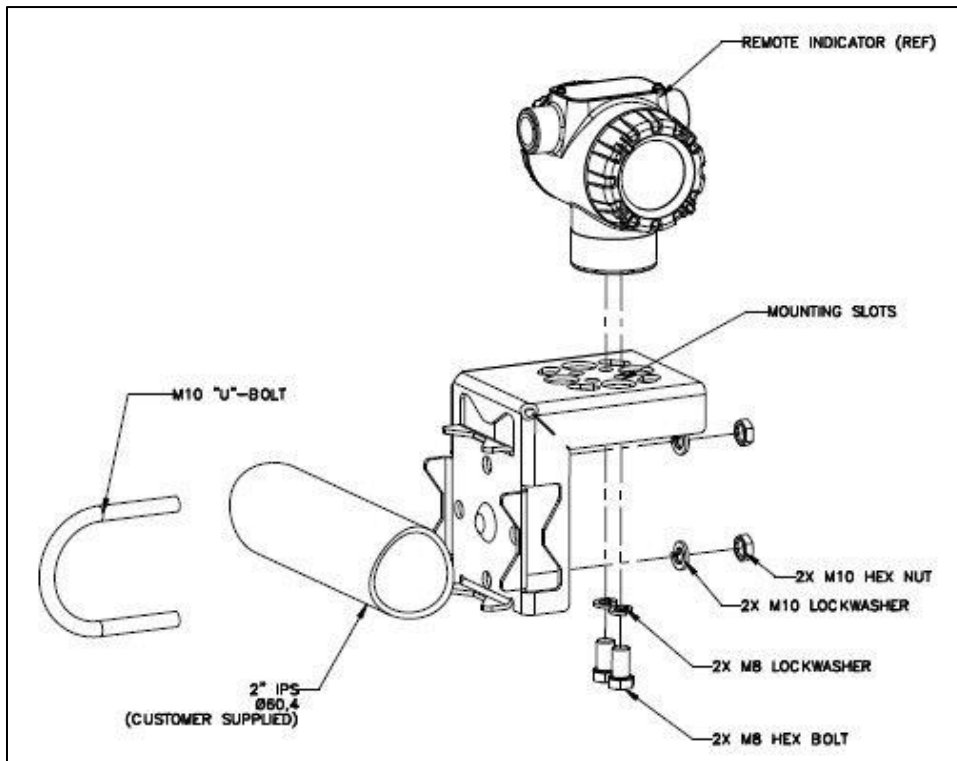


Figure 6: Pipe Mount - Horizontal Mounting Bracket

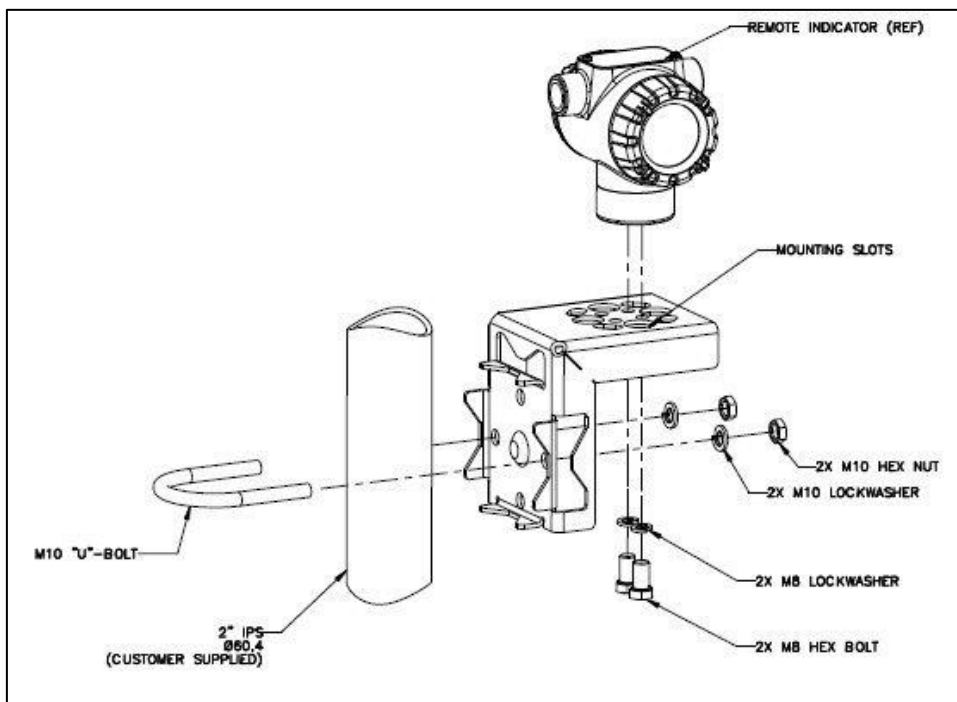


Figure 7: Pipe Mount - Vertical Mounting Bracket

Approval Certifications:

MSG CODE	AGENCY	TYPE OF PROTECTION	Electrical Parameters	Ambient Temperature
C	ATEX	Flame-proof and Dust:  II 2 G Ex db IIC T6..T5 Gb II 2 D Ex tb IIIC T 95°C Db	Note 1	T6: -50°C to 65°C T95°C, T5: -50°C to 85°C
		Intrinsically Safe:  II 1 G Ex ia IIC T4 Ga II 3 G Ex ic IIC T4 Gc	Note 2	-50°C to 70°C
		Non-Incendive  II 3 G Ex ec IIC T4 Gc	Note 1	-50°C to 85°C
		Enclosure: Type IP66/ IP67	ALL	ALL
		STANDARDS: EN 60079-0: 2018; EN 60079-1: 2014; EN 60079-11: 2012; EN 60079-31: 2014; EN 60079-7: 2015+A1: 2018;		
C	UKEX	Flame-proof and Dust:  II 2 G Ex db IIC T6..T5 Gb II 2 D Ex tb IIIC T 95°C Db	Note 1	T6: -50°C to 65°C T95°C, T5: -50°C to 85°C
		Intrinsically Safe:  II 1 G Ex ia IIC T4 Ga II 3 G Ex ic IIC T4 Gc	Note 2	-50°C to 70°C
		Non-Incendive  II 3 G Ex ec IIC T4 Gc	Note 1	-50°C to 85°C
		Enclosure: Type IP66/ IP67	ALL	ALL
		STANDARDS: EN 60079-0: 2018; EN 60079-1: 2014; EN 60079-11: 2012; EN 60079-31: 2014; EN 60079-7: 2015+A1: 2018;		
D	IECEx	Flame-proof: Ex db IIC T6..T5 Gb Ex tb IIIC T 95°C Db	Note 1	T6: -50°C to 65°C T95°C, T5: -50°C to 85°C
		Intrinsically Safe: Ex ia IIC T4 Ga Ex ic IIC T4 Gc	Note 2	-50°C to 70°C
		Non-Incendive Ex ec IIC T4 Gc	Note 1	-50°C to 70°C
		Enclosure: IP66/ IP67	ALL	ALL
		STANDARDS: IEC 60079-0: 2018; IEC 60079-1: 2014; IEC 60079-11: 2011; IEC 60079-7: 2017; IEC 60079-31: 2014		
E	SAEx	Flame-proof: Ex db IIC T6..T5 Gb Ex tb IIIC T 95°C Db	Note 1	T6: -20°C to 65°C T95°C, T5: -20°C to 85°C
		Intrinsically Safe: Ex ia IIC T4 Ga Ex ic IIC T4 Gc	Note 2	-20°C to 70°C
		Non-Incendive Ex ec IIC T4 Gc	Note 1	--20°C to 85°C
		Enclosure: IP66/ IP67	ALL	ALL
		STANDARDS: IEC 60079-0: 2011; IEC 60079-1: 2014; IEC 60079-11: 2011; IEC 60079-7: 2006; IEC 60079-31: 2013		
F	INMETRO	Flame-proof: Ex db IIC T6..T5 Gb Ex tb IIIC T 95°C Db	Note 1	T6: -50°C to 65°C T95°C, T5: -50°C to 85°C

		Intrinsically Safe: Ex ia IIC T4 Ga Ex ic IIC T4 Gc	Note 2	-50°C to 70°C
		Non-Incendive Ex ec IIC T4 Gc	Note 1	--50°C to 85°C
		Enclosure: IP66/ IP67	ALL	ALL
		STANDARDS: ABNT NBR IEC 60079-0: 2018; ABNT NBR IEC 60079-1: 2016; ABNT NBR IEC 60079-11: 2013; ABNT NBR IEC 60079-7: 2018; ABNT NBR IEC 60079-31: 2014		

MSG CODE	AGENCY	TYPE OF PROTECTION	Electrical Parameters	Ambient Temperature
G	NEPSI	Flame-proof: Ex d IIC T6/T5 Gb Ex tD A21 IP66/67 T95°C	Note 1	T6: -50°C to 65°C T95°C, T5: -50°C to 85°C
		Intrinsically Safe: Ex ia IIC T4 Ga Ex ic IIC T4 Gc	Note 2	-50°C to 70°C
		Non-Incendive Ex nA IIC T4 Gc	Note 1	--50°C to 85°C
		Enclosure: IP66/ IP67	ALL	ALL
		STANDARDS: GB 3836.1-2010; GB 3836.2-2010; GB 3836.4-2014; GB 3836.19-2010; GB 3836.20-2010; GB 12476.1-2013; GB 12476.5-2013		
P	CCoE/ PESO	Flame-proof: Ex db IIC T6..T5 Gb	Note 1	T6: -50°C to 65°C T5: -50°C to 85°C
		Intrinsically Safe: Ex ia IIC T4 Ga	Note 2	-50°C to 70°C
		Enclosure: IP66/ IP67	ALL	ALL
		STANDARDS: IEC 60079-0: 2011; IEC 60079-1: 2014; IEC 60079-11: 2011; IEC 60079-7: 2006; IEC 60079-31: 2013		
K	cCSAus	Explosion proof: Class I, Division 1, Groups A, B, C, D;T6..T4	Note 1	T6: -50°C to +65°C T4, T5: -50 °C to 85°C
		Dust Ignition Proof: Class II, III, Division 1, Groups E, F, G; T4 Class I Zone 1 Ex db IIC T4 Gb Ex db IIC T4 Gb Zone 21 Ex tb IIIC T 95°C Db Ex tb IIIC T 95°C Db		
		Intrinsically Safe: CSA 14.2689056 Class I, II, III, Division 1, Groups A, B, C, D, E, F, G; T4 Ex ia IIC T4 Ga	Note 2	-50°C to 70°C
		Non-Incendive Class I, Division 2, Groups A, B, C, D; T4 Class I Zone 2 Ex nA IIC T4 Gc Ex nA IIC T4 Gc	Note 1	-50°C to 85°C
		Enclosure: Type 4X/ IP66/ IP67	ALL	ALL
		Standards: CSA C22.2 No. 0: 2015; CSA C22.2 No. 30: 2016; CSA C22.2 No. 94-M91; CSA C22.2 No. 25: 2017; CSA C22.2 No. 61010-1: 2017; CSA-C22.2No.157: 2016; C22.2 No. 213: 2017; C22.2 No. CSA 60079-0:2015; C22.2 No. 60079-1: 2016; C22.2 No. 60079-11: 2014; C22.2 No. 60079-15: 2016; C22.2 No. 60079-31: 2015;		

		ANSI/ ISA12.12.01-2017; ANSI/ ISA 61010-1: 2016; ANSI/ UL 60079-0: 2013; ANSI/ UL 60079-1: 2015; ANSI/ UL 60079-11: 2014; ANSI/ UL 60079-15: 2013; ANSI/ UL 60079-31: 2015 ; FM 3600: 2011; FM 3615: 2006; FM Class 3616: 2011; ANSI/ UL 913: 2015; UL 916: 2015; ANSI/ UL 12.27.01: 2017; ANSI/UL 50E: 2015
--	--	--

Notes

1. Operating Parameters:

Input : 4-20 mA ; 42VDC max, 30mA.

2. Intrinsically Safe Entity Parameters

For details see Control Drawing, 50089981.

Model Selection Guide

The Model Selection Guide is subject to change and is inserted into the specification as guidance only.

Model RMA800

Remote Indicator

Model Selection Guide

34-ST-16-90 Issue 14U



Instructions: Make selections from all Tables Key through VI using column below the proper arrow. Asterisk indicates availability. Letter (a) refer to restrictions highlighted in the restrictions table. Tables delimited with dashes.

List Price: Price equals the sum of prices for all selections made.

Key	I	II	III	IV	V	VI
RMA80	-	-	-	-	-	00000

List Price
equals the
sum of prices
for all
selections.

KEY NUMBER		BASE MODEL		Selection			
Remote Indicator	DE Protocol or Analog (4-20mA DC)	RMA801	↓				
	Foundation Fieldbus	RMA803	↓				
TABLE I AGENCY APPROVALS (see data sheet for Approval Code Details)							
Approvals	No Approvals Required			0	*	*	
	FM Explosion proof, Intrinsically Safe, Non-incendive, & Dustproof			A		*	
	CSA Explosion proof, Intrinsically Safe, Non-incendive, & Dustproof			B		*	
	ATEX Explosion proof, Intrinsically Safe & Non-incendive			C	*	*	
	IECEx Explosion proof, Intrinsically Safe & Non-incendive			D	*	*	
	cCSAus Explosion proof, Intrinsically Safe, Non-incendive, & Dustproof-Canada & US			K	*		
	SAEx/CCoE Explosion proof, Intrinsically Safe & Non-incendive			E	*	*	
	INMETRO Explosion proof, Intrinsically Safe & Non-incendive			F	*	*	
	NEPSI Explosion proof, Intrinsically Safe & Non-incendive			G	*	*	
	KOSHA Explosion proof, Intrinsically Safe & Non-incendive			H	*		
	CCoE Explosion proof, Intrinsically Safe & Non-incendive			P		*	
	TABLE II TRANSMITTER ELECTRONICS SELECTIONS						
a. Electronic Housing Material & Connection Type	Material	Connection	Lightning Protection				
	Polyester Powder Coated Aluminum	1/2 NPT	None	A		*	
	Polyester Powder Coated Aluminum	M20	None	B		*	
	Polyester Powder Coated Aluminum	1/2 NPT	Yes	C		*	
	Polyester Powder Coated Aluminum	M20	Yes	D		*	
	316 Stainless Steel (Grade CF8M)	1/2 NPT	None	E		*	
	316 Stainless Steel (Grade CF8M)	M20	None	F		*	
	316 Stainless Steel (Grade CF8M)	1/2 NPT	Yes	G		*	
b. Protocol Compatibility	Communications Protocol						
	DE protocol or Analog (4-20mA DC) Foundation Fieldbus Enabled			D	*		
c. Customer Interface Selections	Display	External Config Buttons	Languages				
	Standard	None (Integrated on Display)	English	A	*		
	Advanced	None	EN, GE, FR, IT, SP, RU, TU	D		*	
	Advanced	External	EN, GE, FR, IT, SP, RU, TU	E		*	
	Advanced	None	EN, CH, JP	H		*	
b. Configuration	Factory Configuration						
	Factory Standard			S	*	*	
Write Protection							
Disabled				T	*		
Enabled							
TABLE III CONFIGURATION SELECTIONS							
a. Application Software	Application Software						
	Standard Software						
b. Configuration	Additional Function Blocks (Fieldbus Only: Adds PID, Char, Arith, Selector & Integ blocks)						
	Factory Configuration						
Factory Standard					1	*	*
Factory Standard					2	*	*

TABLE IV		ACCESSORY SELECTIONS		RMA803 RMA801	
a. Mounting Bracket	Bracket Type	Material			
	None	None	0 _ _ _	*	*
	Flat Pipe Mounting Bracket	Carbon Steel	1 _ _ _	*	*
	Flat Pipe Mounting Bracket	316 Stainless Steel	2 _ _ _	*	*
	Wall Mounting Bracket	Carbon Steel	3 _ _ _	*	*
	Wall Mounting Bracket	316 Stainless Steel	4 _ _ _	*	*
	Marine Approved Mounting Bracket	316 Stainless Steel	5 _ _ _	*	*
	Angle Pipe Mounting Bracket	Carbon Steel	6 _ _ _	*	*
	Angle Pipe Mounting Bracket	316 Stainless Steel	7 _ _ _	*	*
b. Customer Tag	Customer Tag Type				
	No customer tag		_ 0 _ _	*	*
	One Wired Stainless Steel Tag (Up to 4 lines 26 char/line)		_ 1 _ _	*	*
Two Wired Stainless Steel Tag (Up to 4 lines 26 char/line)		_ 2 _ _	*	*	
c. Unassembled Conduit Plugs & Adapters	Unassembled Conduit Plugs & Adapters				
	No Conduit Plugs or Adapters Required		_ _ A0	*	*
	1/2 NPT Male to 3/4 NPT Female 316 SS Certified Conduit Adapter		_ _ A2	n	n
	1/2 NPT 316 SS Certified Conduit Plug		_ _ A6	n	n
	M20 316 SS Certified Conduit Plug		_ _ A7	m	m
TABLE V		OTHER Certifications & Options:(String in sequence comma delimited (XX, XX, XX,...))			
a. Additional Options	None - No additional options required		00	*	*
	Marine (LR Only)		MT		d
	Certificate of Conformance		F3	*	*
	Certificate of Origin		F5	*	*
	Extended Warranty Additional 1 year		01	*	*
	Extended Warranty Additional 2 years		02	*	*
	Extended Warranty Additional 3 years		03	*	*
	Extended Warranty Additional 4 years		04	*	*
	Extended Warranty Additional 15 years		15	*	*
TABLE VI		MANUFACTURING SPECIALS			
Factory	Factory Identification		0000	*	*
MODEL RESTRICTIONS					
Restriction Letter	Available Only with		Not Available with		
	Table	Selection(s)	Table	Selection(s)	
d	Ila	C, D, G, H _ _	IVa	1,2,3,4,6,7 _ _ _	
m	Ila	B, D, F, H _ _			
n	Ila	A, C, E, G _ _			
b	Select only one option from this group				
PRODUCT MANUALS					
Description				Part Number	
RMA801 Remote Meter Assembly HART / DE manual - English				34-ST-25-62	
RMA803 Remote Meter Assembly Foundation Fieldbus manual - English				34-ST-25-51	

Sales and Service

For application assistance, current specifications, pricing, or name of the nearest Authorized Distributor, contact one of the offices below.

ASIA PACIFIC

Honeywell Process Solutions,
(TAC) hfs-tac-support@honeywell.com

Australia

Honeywell Limited
Phone: +(61) 7-3846 1255
FAX: +(61) 7-3840 6481
Toll Free 1300-36-39-36
Toll Free Fax:
1300-36-04-70

China – PRC - Shanghai

Honeywell China Inc.
Phone: (86-21) 5257-4568
Fax: (86-21) 6237-2826

Singapore

Honeywell Pte Ltd.
Phone: +(65) 6580 3278
Fax: +(65) 6445-3033

South Korea

Honeywell Korea Co Ltd
Phone: +(822) 799 6114
Fax: +(822) 792 9015

EMEA

Honeywell Process Solutions,
Phone: (TAC) + 80012026455 or
+44 1202645583

Email: (Sales)

FP-Sales-Apps@Honeywell.com

or

(TAC)

hfs-tac-support@honeywell.com

Web

Knowledge Base search
engine <http://bit.ly/2N5Vldi>

AMERICA'S

Honeywell Process Solutions,
Phone: (TAC) 1-800-423-9883 or
215/641-3610
(Sales) 1-800-343-0228

Email: (Sales)

FP-Sales-Apps@Honeywell.com

or

(TAC)

hfs-tac-support@honeywell.com

Web

Knowledge Base search
engine <http://bit.ly/2N5Vldi>

Specifications are subject to change without notice.

For more information

To learn more about SmartLine devices,
visit www.process.honeywell.com
Or contact your Honeywell Account Manager

Process Solutions

Honeywell
1250 W Sam Houston Pkwy S
Houston, TX 77042

Honeywell Control Systems Ltd
Honeywell House, Skimped Hill Lane
Bracknell, England, RG12 1EB

Shanghai City Centre, 100 Jungi Road
Shanghai, China 20061

www.process.honeywell.com



34-ST-03-148
September 2022
©2022 Honeywell International Inc.