


Terminal blocks

## Klippon® Connect - SNAP INto the future

The world's first terminal blocks with innovative SNAP IN technology

SNAP IN 

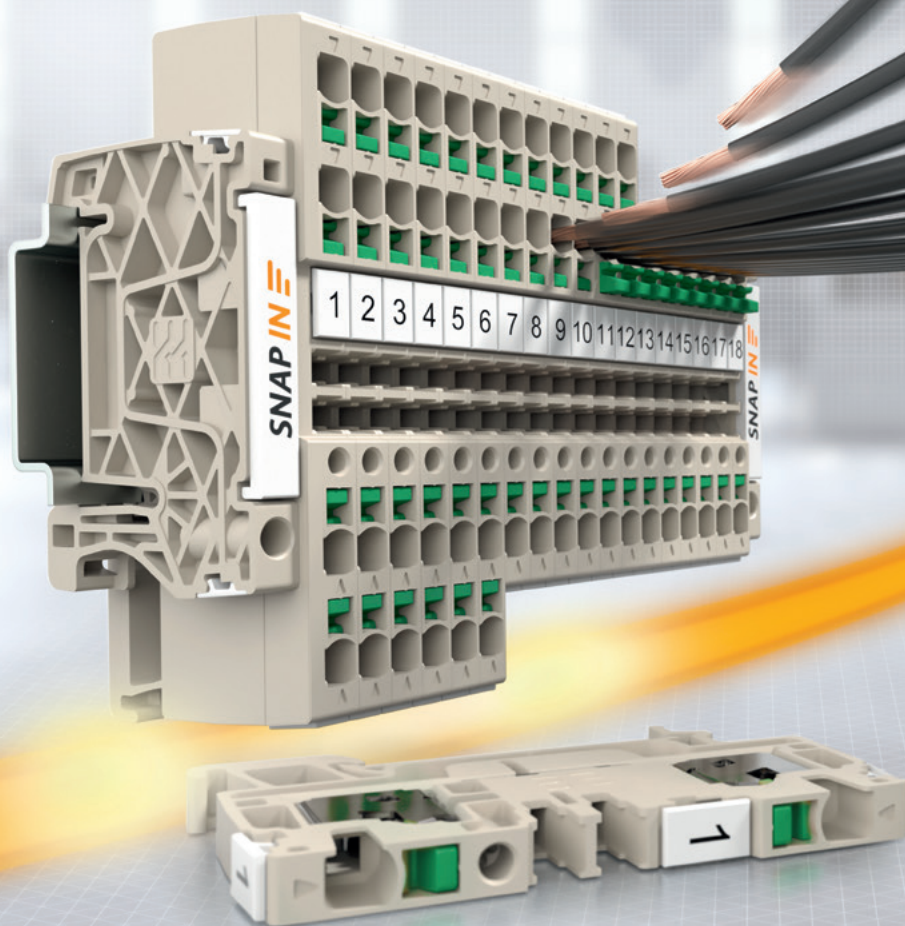


**Weidmüller** 

# The worldwide novelty from the pioneer of industrial connectivity

## Klippon® Connect terminal blocks with innovative SNAP IN technology

Time is money. For this reason, installation work in control cabinet construction must be carried out ever faster, preferably automated. At the same time, the connections should be permanently reliable, safe, and easy to maintain. The new Klippon® Connect terminal blocks with Weidmüller's revolutionary SNAP IN technology meet all these requirements - and are extremely easy to use: stripped fine-stranded conductors just need to be inserted into the connection point, and the connection point snaps shut with a clearly audible click. The conductor is permanently and reliably contacted. To release the connection, press the green pusher. It couldn't be faster or easier.

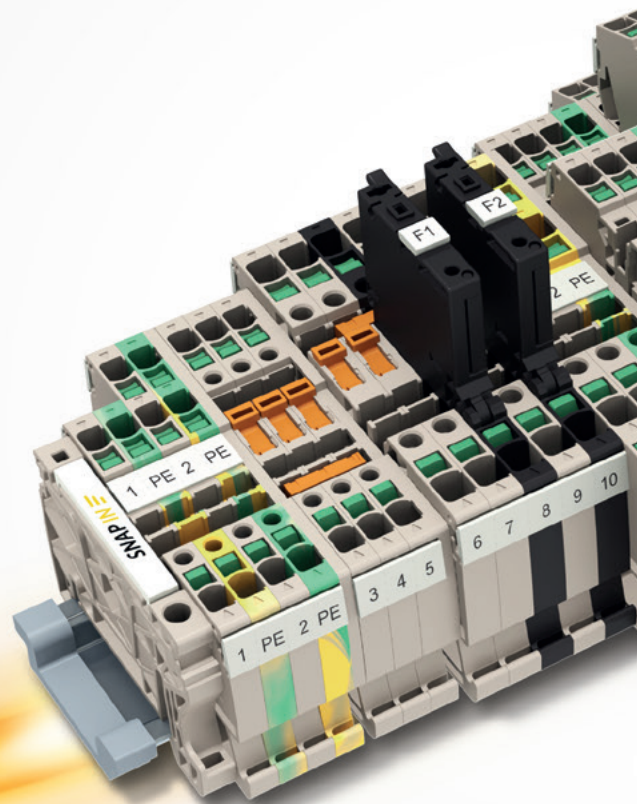

### Your special advantages:



Thanks to the self-releasing connection mechanism, the SNAP IN technology could be connected in record time.




Simple and tool-free connection of flexible and fine-stranded conductors even without a wire end ferrule.



Safety which you could hear! A clear „Click” sound signals the safe connection.

# SNAP IN

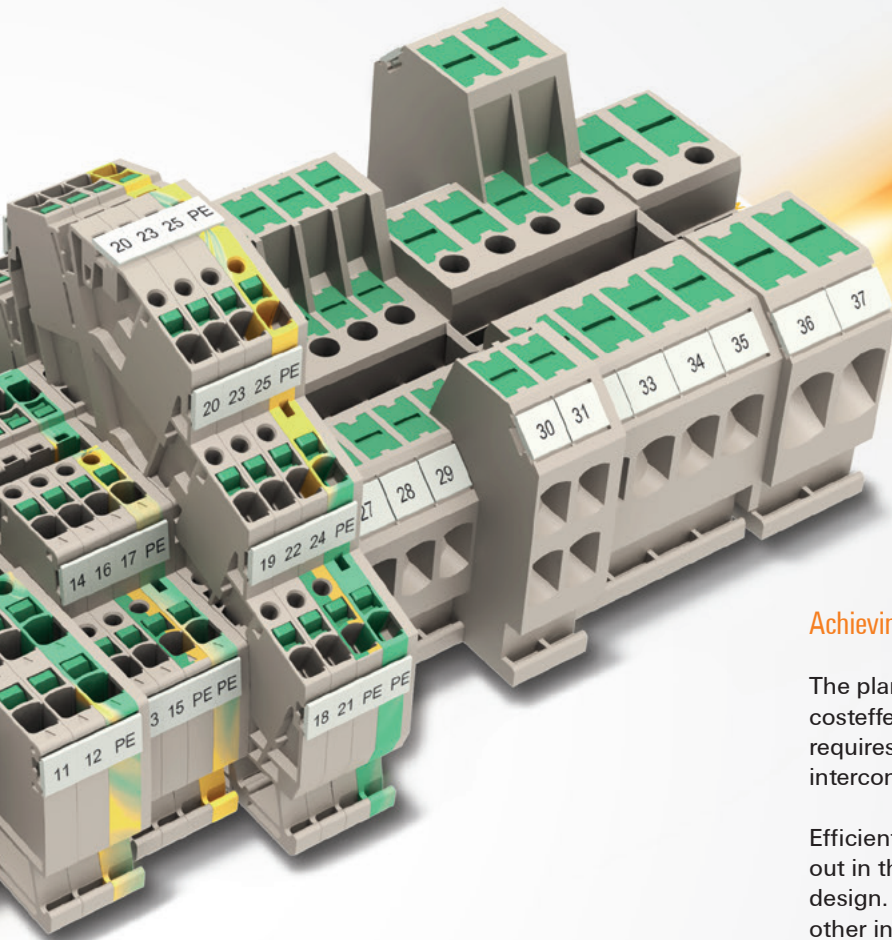

## Achieving added value at all stages of panel building

The planning phase is crucial for the success and costeffectiveness of the entire panel building process, and requires the intelligent interplay of digital product data and interconnected engineering tools.

Efficient, easy wiring is key to installation. Our products stand out in this respect with their intuitive handling and clear design. All terminal functions can be distinguished from each other instantly.

Our Klippon® Connect products feature standardised test points which make automated testing and checking processes possible. In this way, maintenance and testing tasks can be carried out much more safely and faster.



With the innovative SNAP IN connection, fully automated wiring processes become reality.



Complete terminal strips could be planned digitally via the WMC and ordered - including accessories.



With the „Fast delivery service“, the fully assembled terminal strips are delivered directly to the place of use.


## Pioneers in industrial connectivity

Being a pioneer means reinventing yourself time and time again

More than 75 years of experience, several billion connections manufactured and countless hours of development make Weidmüller terminal blocks the safest and most powerful on the market.

# 1948


**SAK-Series**



First plastic isolated terminal block

# 1978


**DSK-Series**



First terminal block with direct plug in technology

# 1983

**W-Series**



First terminal block with self locking clamping yoke technology

# 1993

**Z-Series**



First terminal block from Weidmüller with tension clamp technology


**SNAP IN** 



**2021**

---


**S-Series**

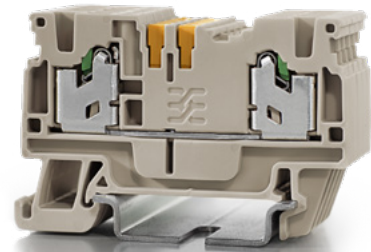

**2004**

---

**P-Series**



First terminal block family from Weidmüller with PUSH IN technology

**2016**

---

**A-Series**



First terminal block family with PUSH IN technology with pushers and application products

First terminal block family with SNAP IN technology



## Quick, simple and safe - just SNAP IN

Your benefits at a glance



### QUICK

The new SNAP IN connection technology will take your wiring processes to a whole new level.



### SIMPLE

Direct and tool-free wiring without wire end ferrules. Simply insert the stripped conductor into the pre-loaded connection point.



### SAFE

The pre-loaded SNAP IN spring connection guarantees a safe and gas-tight connection of the conductor.




### READY-TO-ROBOT

Ready-to-robot and optimally equipped for the automation processes of the future.

## Klippon® Connect with SNAP IN technology: For an acceleration of your wiring processes


Simply insert the conductor into the connection point - „Click” and the reliable connection is ready. The conductor is contacted in the clamping point with a clear „click”. The triggered clamping point is additionally signaled visually by an increased pusher.

Klippon® Connect terminal blocks with SNAP IN technology revolutionize the wiring of control cabinets with their intuitive and simple handling. The pre-loaded clamping point allows direct and tool-free wiring of solid and flexible conductors even without ferrules. The reduction of wire preparation speeds up your wiring times and leads to a more efficient installation process.

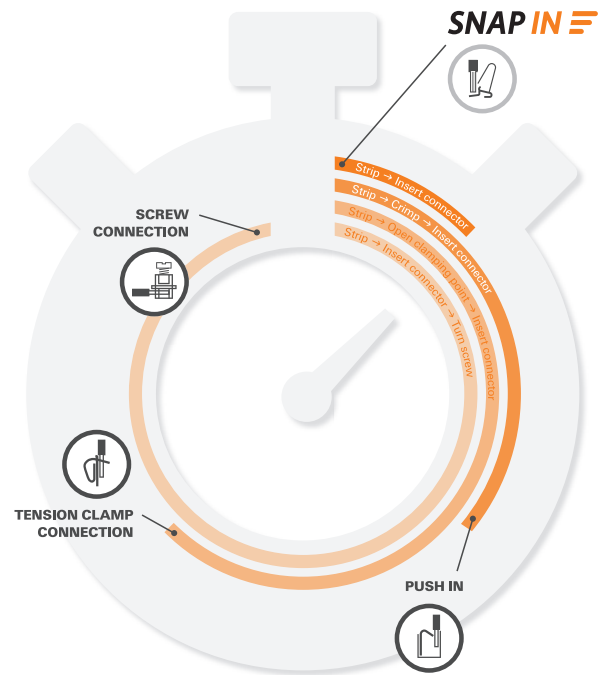

### SNAP IN

- Intuitive and simple handling of SNAP IN technology
- Low mating forces due to simple insertion of the stripped conductor
- Quick and easy connection even without ferrule



### PUSH IN

- Tool-free, vibration-proof and gas-tight connection
- Stainless steel spring guarantees a high contact force of the conductor on the current bar
- Simply insert stripped solid conductors into the clamping point



### Tension clamp connection

- Separation of electrical and mechanical functions
- Low contact resistance and high corrosion resistance
- Insensitive to vibrations and high conductor pull-out forces



### Screw connection

- Gas-tight, vibration-resistant connection
- Excellent contact force
- Suitable for the connection of solid and flexible stranded wires


## Klippon® Connect with SNAP IN technology: For simple and intuitive operation

The new connection is as simple in principle as it is to use: The terminal blocks are delivered with pre-loaded spring. Stripped wires could be easily and safely inserted into the clamping point without further preparation. The conductor is contacted in the clamping point with a clear „Click“. And it's just as fast the other way round. By pressing the pusher, the conductor can be quickly and easily released at any time and the clamping point pre-loaded again.



### Step 1

The terminal blocks are delivered with pre-loaded spring. The status of the pre-loaded terminal block is signaled by the height position of the pusher.

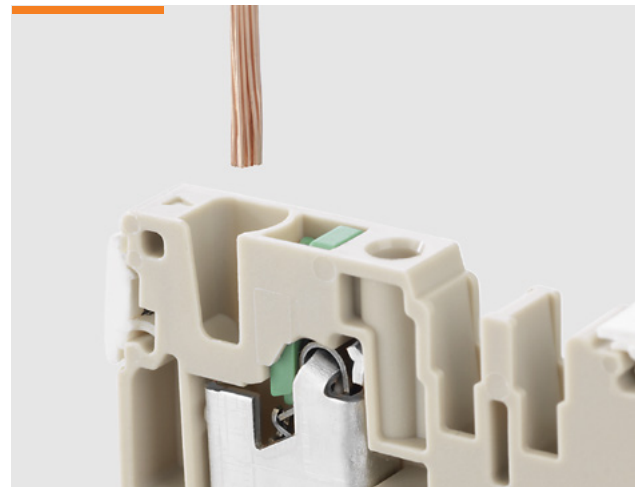


### Step 2

Stripped wires could be easily and safely inserted into the clamping point without further preparation.



### Step 3

The conductor is contacted in the clamping point with a clear „Click“. The triggered clamping point is additionally signaled visually by an increased pusher.

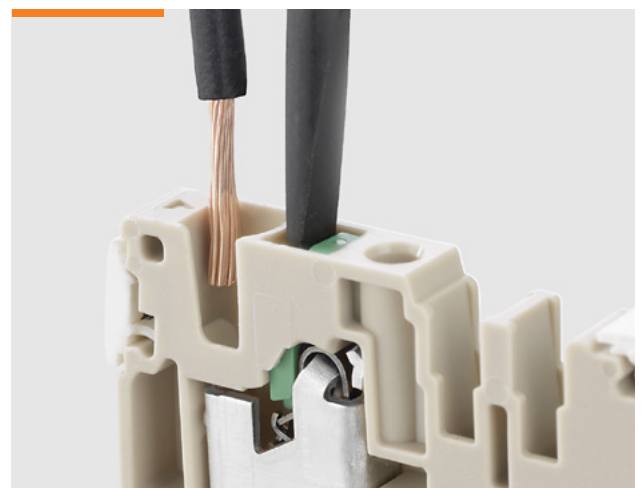

### Step 4



By pressing the pusher, the conductor can be quickly and easily released at any time and the clamping point pre-loaded again.

## Klippon® Connect with SNAP IN technology: For guaranteed and safe conductor connection

The pre-tensioned contact point technology allows flexible conductors without wire-end ferrules to be plugged in directly with low insert force. A special tool is not required.

Once the conductor is inserted correctly and deeply enough into the contact point, the contact point is reliably triggered. Reliable contacting of the conductor guarantees that the wire connection is protected against vibration, gas-tight and stable for the long-term.

In addition to the audible "Click", the pusher is elevated to indicate the secure connection. Klippon® Connect rail-mounted terminal blocks with innovative SNAP IN technology ensure maximum process reliability.

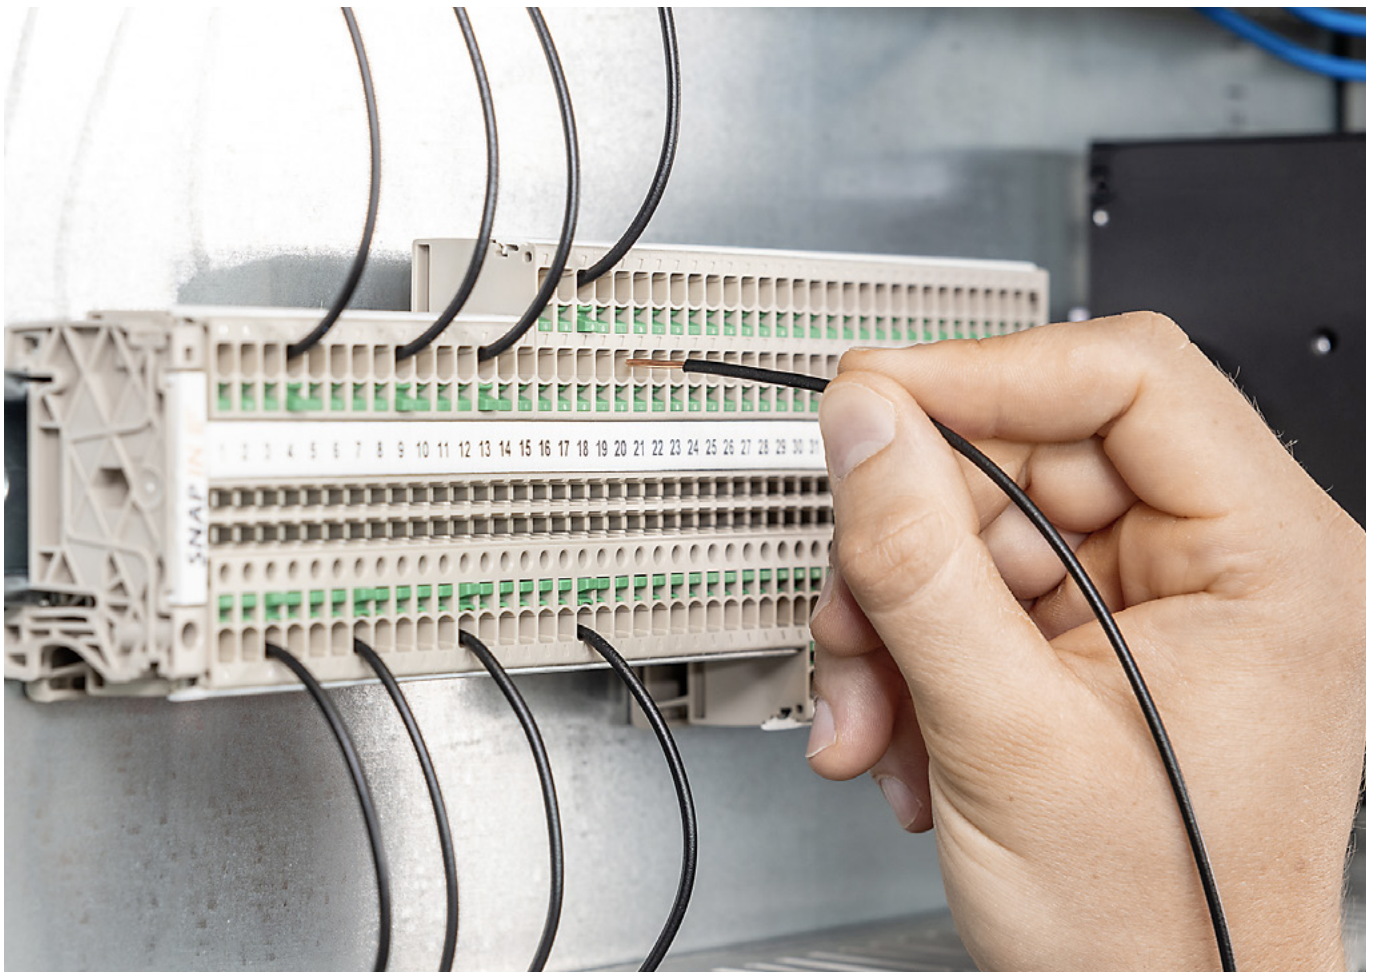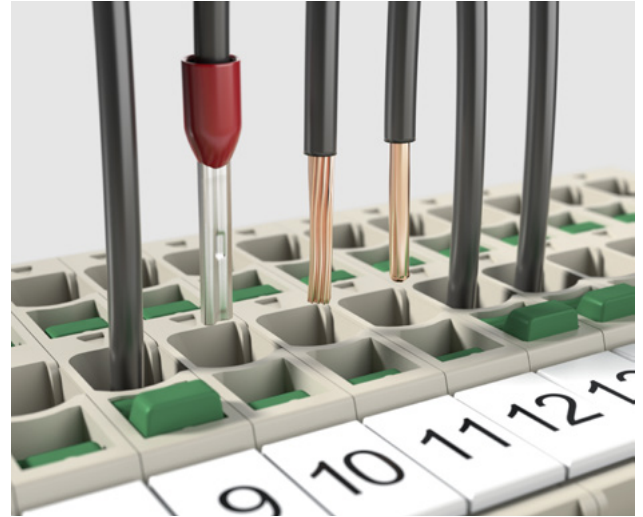


## Klippon® Connect with SNAP IN technology: For the automation of the future

Increasing automation in panel building is posing new requirements for future terminal blocks. These requirements were already taken into account during the development phase. The optimized design supports a robot-assisted assembly. Pre-assembled markers in combination with the Klippon® Automated RailLaser, automated marking of the terminal strip. The open connection point of the S-series - „ready to wire“ - also enables robot-assisted wiring of terminal strip.

### Automated assembly with Klippon® Automated RailAssembler

With automated production processes, errors can be avoided, workflows accelerated, and costs reduced. This works best with solutions based on each other and thought out down to the last detail. The contours of the new SNAP IN S-Series terminal blocks have been designed to be easily gripped and mounted by industrial robots. This means there is no obstacle to automated assembly today.

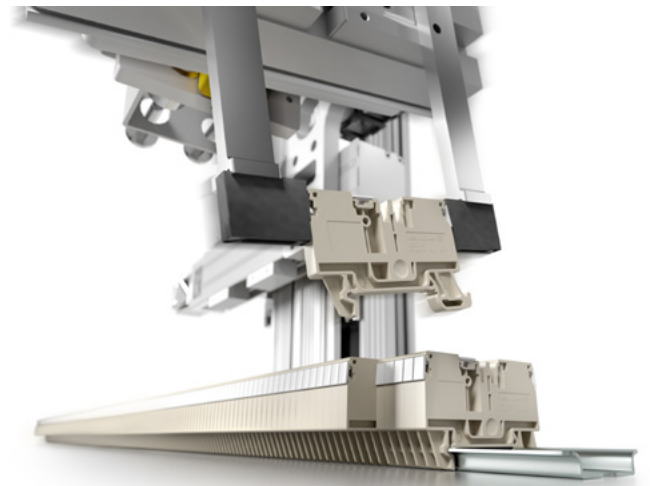

#### Klippon® Automated RailAssembler

- Up to 60 % time saving in terminal block assembly (or significantly more considering the unmanned operation of up to 7 hours)
- Avoidance of incorrect assembly thanks to data consistency between eCAD programs and Weidmüller Configurator (WMC)
- Easy handling due to universal magazines

#### Ordering data

Type	Order No.
RAILASSEMBLER	2738690000



Take a closer look at the Klippon® Automated RailAssembler.  
Just scan the QR code and watch the video.

## Automated marking with Klippon® Automated RailLaser

Marking terminal blocks usually is a time-consuming process with a high risk of error. SNAP IN S-Series terminal block design has therefore been optimised for fully automated laser marking, which saves time – up to 90 % The Klippon® Automated RailLaser, in conjunction with the Weidmüller Configurator (WMC), achieves maximum marking quality and error-proofing.



### Klippon® Automated RailLaser

- Up to 90 % time saving in marking process
- Avoidance of incorrect markings due to the consistent use of data from eCAD programs when using the Weidmüller Configurator (WMC)
- Excellent marking quality and highquality print image on a wide variety of materials

### Ordering data


Type	Order No.
RAILLASER	2705010000



Take a closer look at the Klippon® Automated RailLaser. Just scan the QR code and watch the video.

## Automated wiring

Full order books and a growing lack of skilled workers are driving digitalisation and automation in control cabinet production. That is why Klippon® Connect SNAP IN terminal blocks are already prepared for tomorrow's automation processes. The simple and safe handling of SNAP IN technology facilitates the use of automated wiring processes and prevents incorrect wiring.

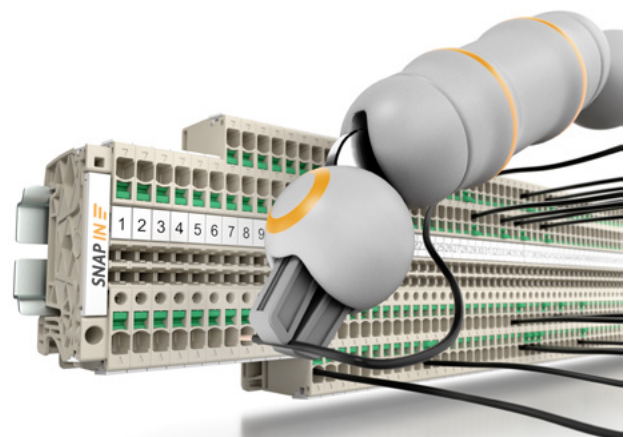


**Spring connection with SNAP IN technology (S-Series)**  
**Feed-through terminal blocks**

**S2C 2.5**

**2.5 mm<sup>2</sup>**

**SNAP IN**



Width/Height/Depth	mm
max. current / max. cond. cross-section	A/mm <sup>2</sup>
Max. clamping range	mm <sup>2</sup>

5.1 x 59 x 38	
<b>24 / 2.5</b>	
<b>0.34...2.5</b>	

**Technical data**

Rated data	
Rated voltage	V
Rated current	A
for wire cross-section	mm <sup>2</sup>
Short Circuit Current Rating (SCCR)	
Rated impulse withstand voltage / Pollution severity	
Gauge to IEC 60947-1 / UL 94 flammability rating	
Approvals	
Clamped conductors	
Solid / Stranded	mm <sup>2</sup>
Flexible / Flexible with ferrule	mm <sup>2</sup>
Stripping length / Blade size	mm/-

IEC 60947-7-1

IEC	UL	CSA	EN 60079-7
800	600	600	
24	20	15	
2.5	AWG 22...12	AWG 20...14	
100kA			
8 kV / 3			
A2 / V-0			

CE

Rated connection	
0.5...2.5 / 0.5...2.5	
0.5...2.5 / 0.34...2.5	
10 / 0.6 x 3.5 mm	

**Note**

**Ordering data**

Version	
	dark beige
	Blue
	Orange

**Note**

**Accessories**


Plug-in cross-connection	
	2-pole
	10-pole
	2-pole
	10-pole
Vertical jumpers	
	1-pole
End plate	
	dark beige
	blue
End bracket	
	dark beige, screwable
	dark beige, direct mounting
Test adapter	
	1-pole
	stackable
	3-pole
	5-pole
Test plug	
Screwdriver	
	Standard
Marking tags	

For detailed information on other accessories and application in the online catalogue

**S3C 2.5**

**2.5 mm<sup>2</sup>**

**SNAP IN**



5.1 x 71.5 x 38	
<b>24 / 2.5</b>	
<b>0.34...2.5</b>	

IEC 60947-7-1

IEC	UL	CSA	EN 60079-7
800	600	600	
24	20	15	
2.5	AWG 22...12	AWG 20...14	
100kA			
8 kV / 3			
A2 / V-0			

CE

Rated connection	
0.5...2.5 / 0.5...2.5	
0.5...2.5 / 0.34...2.5	
10 / 0.6 x 3.5 mm	

**Note**

**Ordering data**

Type	Qty.	Order No.
S3C 2.5	100	2674540000
S3C 2.5 BL	100	2753950000
S3C 2.5 OR	100	2875130000

**Note**


Type	Qty.	Order No.
ZQV 2.5N/2	24 A 60	1527540000
ZQV 2.5N/10	24 A 20	1527690000
SEP 2C 2.5	20	2751080000
SEP 3C 2.5	20	2751090000
AEB 35 SC/1	50	1991920000
AEB 35 SCL/1 VO	20	2661280000
ATPG 1.5-10 L	0.2 A 50	1991890000
ATPG 2.5 MHR	0.2 A 50	1991960000
ATPG 2.5/3	0.2 A 25	2041190000
ATPG 2.5/5	0.2 A 25	2041180000
PS 2.0 MC	20	0310000000
SDIL 0,6X3,5X100	1	2749140000
DEK 5/5 PLUS MC NE WS	1000	1854490000
DEK 5/5 MM WS	800	2007110000
WS 8/5 MM WS	800	2007150000
WS 10/5 M PLUS MC NE WS	600	2003770000

For detailed information on other accessories and application in the online catalogue

S4C 2.5

2.5 mm<sup>2</sup>

**SNAP IN**



5.1 x 84 x 38  
24 / 2.5  
0.34...2.5



IEC 60947-7-1

IEC	UL	CSA	EN 60079-7
800	600	600	
24	20	15	
2.5	AWG 22...12	AWG 20...14	
100kA			
8 kV / 3			
A2 / V-0			



**Rated connection**

0.5...2.5 / 0.5...2.5

0.5...2.5 / 0.34...2.5

10 / 0.6 x 3.5 mm

Type	Qty.	Order No.
S4C 2.5	100	2674550000
S4C 2.5 BL	100	2753960000
S4C 2.5 OR	100	2875140000


Type	Qty.	Order No.
ZQV 2.5N/2	24 A 60	1527540000
ZQV 2.5N/10	24 A 20	1527690000
SEP 4C 2.5	20	2751100000
AEB 35 SC/1	50	1991920000
AEB 35 SCL/1 V0	20	2661280000
ATPG 1.5-10 L	0.2 A 50	1991890000
ATPG 2.5 MI-R	0.2 A 50	1991960000
ATPG 2.5/3	0.2 A 25	2041190000
ATPG 2.5/5	0.2 A 25	2041180000
PS 2.0 MC	20	0310000000
SDIL 0,6X3,5X100	1	2749140000
DEK 5/5 PLUS MC NE WS	1000	1854490000
DEK 5/5 MM WS	800	2007110000
WS 8/5 MM WS	800	2007150000
WS 10/5 M PLUS MC NE WS	600	2003770000

**Spring connection with SNAP IN technology (S-Series)**  
**Feed-through terminal blocks**

**S2C 4**

**4 mm<sup>2</sup>**

**SNAP IN**



Width/Height/Depth	mm
max. current / max. cond. cross-section	A/mm <sup>2</sup>
Max. clamping range	mm <sup>2</sup>

6.1 x 62 x 41.5	
<b>32 / 4</b>	
<b>0.75...4</b>	

**Technical data**

Rated data	
Rated voltage	V
Rated current	A
for wire cross-section	mm <sup>2</sup>
Short Circuit Current Rating (SCCR)	
Rated impulse withstand voltage / Pollution severity	
Gauge to IEC 60947-1 / UL 94 flammability rating	
Approvals	
Clamped conductors	
Solid / Stranded	mm <sup>2</sup>
Flexible / Flexible with ferrule	mm <sup>2</sup>
Stripping length / Blade size	mm/-

IEC 60947-7-1

IEC	UL	CSA	EN 60079-7
1000	600		
32	30		
4	AWG 20...10		
	100kA		
	8 kV / 3		
	A4 / V-0		

Rated connection	
0.75...4 / 0.75...4	
0.75...4 / 0.75...4	
12 / 0.6 x 3.5 mm	

**Note**

**Ordering data**

Version	
	dark beige
	Blue
	Orange

**Note**

Type	Qty.	Order No.
S2C 4	50	<b>2874820000</b>
S2C 4 BL	50	<b>2874830000</b>
S2C 4 OR	50	<b>3023540000</b>

**Accessories**

Plug-in cross-connection	
	2-pole
	10-pole
	2-pole
	10-pole
Vertical jumpers	
	1-pole
End plate	
	dark beige
	blue
End bracket	
	dark beige, screwable
	dark beige, direct mounting
Test adapter	
	1-pole
	stackable
	3-pole
	5-pole
Test plug	
Screwdriver	
	Standard
Marking tags	


Type	Qty.	Order No.
ZQV 4N/2	32 A 60	<b>1527930000</b>
ZQV 4N/10	32 A 20	<b>1528090000</b>
SEP 2C 4	20	<b>2874790000</b>
AEB 35 SC/1	50	<b>1991920000</b>
AEB 35 SCL/1 VO	20	<b>2661280000</b>
ATPG 1.5-10 L	0.2 A 50	<b>1991890000</b>
ATPG 4 MHR	0.2 A 50	<b>1991860000</b>
PS 2.0 MC	20	<b>0310000000</b>
SDIL 0,6X3,5X100	1	<b>2749140000</b>
WS 10/6 M PLUS MC NE WS	600	<b>2003780000</b>
WS 8/6 MM WS	600	<b>2007160000</b>
DEK 5/6 MM WS	600	<b>2007120000</b>
DEK 5/6 PLUS MC NE WS	1000	<b>1011320000</b>

For detailed information on other accessories and application in the online catalogue

**S3C 4**

**4 mm<sup>2</sup>**

**SNAP IN**



6.1 x 78 x 41.5	
<b>32 / 4</b>	
<b>0.75...4</b>	

IEC 60947-7-1

IEC	UL	CSA	EN 60079-7
1000	600		
32	30		
4	AWG 20...10		
	100kA		
	8 kV / 3		
	A4 / V-0		

Rated connection	
0.75...4 / 0.75...4	
0.75...4 / 0.75...4	
12 / 0.6 x 3.5 mm	

**Note**


Type	Qty.	Order No.
S3C 4	50	<b>2874840000</b>
S3C 4 BL	50	<b>2874850000</b>
S3C 4 OR	50	<b>3023550000</b>

Type	Qty.	Order No.
ZQV 4N/2	32 A 60	<b>1527930000</b>
ZQV 4N/10	32 A 20	<b>1528090000</b>
SEP 3C 4	20	<b>2874800000</b>
AEB 35 SC/1	50	<b>1991920000</b>
AEB 35 SCL/1 VO	20	<b>2661280000</b>
ATPG 1.5-10 L	0.2 A 50	<b>1991890000</b>
ATPG 4 MHR	0.2 A 50	<b>1991860000</b>
PS 2.0 MC	20	<b>0310000000</b>
SDIL 0,6X3,5X100	1	<b>2749140000</b>
WS 10/6 M PLUS MC NE WS	600	<b>2003780000</b>
WS 8/6 MM WS	600	<b>2007160000</b>
DEK 5/6 MM WS	600	<b>2007120000</b>
DEK 5/6 PLUS MC NE WS	1000	<b>1011320000</b>

S4C 4

4 mm<sup>2</sup>

**SNAP IN**



6.1 x 94 x 41.5  
32 / 4  
0.75...4



IEC 60947-7-1

IEC	UL	CSA	EN 60079-7
1000	600		
32	30		
4	AWG 20...10		
	100kA		
	8 kV / 3		
	A4 / V-0		



**Rated connection**

0.75...4 / 0.75...4

0.75...4 / 0.75...4

12 / 0.6 x 3.5 mm


Type	Qty.	Order No.
S4C 4	50	2874860000
S4C 4 BL	50	2874870000
S4C 4 DR	50	3023560000

Type	Qty.	Order No.
ZQV 4N/2	32 A 60	1527930000
ZQV 4N/10	32 A 20	1528090000
SEP 4C 4	20	2874810000
AEB 35 SC/1	50	1991920000
AEB 35 SCL/1 VO	20	2661280000
ATPG 1.5-10 L	0.2 A 50	1991890000
ATPG 4 MI-R	0.2 A 50	1991860000
PS 2.0 MC	20	0310000000
SDIL 0,6X3,5X100	1	2749140000
WS 10/6 M PLUS MC NE WS	600	2003780000
WS 8/6 MM WS	600	2007160000
DEK 5/6 MM WS	600	2007120000
DEK 5/6 PLUS MC NE WS	1000	1011320000

**Spring connection with SNAP IN technology (S-Series)**  
**Feed-through terminal blocks**


**SL2C 6**

**6 mm<sup>2</sup>**



**SL3C 6**

**6 mm<sup>2</sup>**




Width/Height/Depth	mm
max. current / max. cond. cross-section	A/mm <sup>2</sup>
Max. clamping range	mm <sup>2</sup>

8,2 x 42,2 x 62,8
<b>41 / 10</b>
<b>1,5...10</b>





8,2 x 57,6 x 76,7
<b>41 / 10</b>
<b>1,5...10</b>



**Technical data**

Rated data	
Rated voltage	V
Rated current	A
for wire cross-section	mm <sup>2</sup>
Short Circuit Current Rating (SCCR)	
Rated impulse withstand voltage / Pollution severity	
Gauge to IEC 60947-1 / UL 94 flammability rating	
Approvals	
Clamped conductors	
Solid / Stranded	mm <sup>2</sup>
Flexible / Flexible with ferrule	mm <sup>2</sup>
Stripping length / Blade size	mm/-

IEC 60947-7-1			
IEC	UL	CSA	EN 60079-7
1000			
41			
6			
	10kA		
	8 kV / 3		
	A5 / V-0		
			
Rated connection			
1,5...10 / 1,5..10			
1,5...10 / 1,5..6			
12 / 1,0 x 5,5 mm			

IEC 60947-7-1			
IEC	UL	CSA	EN 60079-7
1000			
41			
6			
	10kA		
	8 kV / 3		
	A5 / V-0		
			
Rated connection			
1,5...10 / 1,5..10			
1,5...10 / 1,5..6			
12 / 1,0 x 5,5 mm			

<b>Note</b>
-------------

<b>Note</b>
-------------

<b>Note</b>
-------------

**Ordering data**

Version	
	dark beige
	Blue
<b>Note</b>	

Type	Qty.	Order No.
SL2C 6	50	<b>3037380000</b>
SL2C 6 BL	50	<b>3037390000</b>
<b>Note</b>		

Type	Qty.	Order No.
SL3C 6	50	<b>3037410000</b>
SL3C 6 BL	50	<b>3037420000</b>
<b>Note</b>		

**Accessories**

Plug-in cross-connection	
	2-pole
	3-pole
	4-pole
End plate	
	dark beige
End bracket	
	dark beige, screwable
	dark beige, direct mounting
Test adapter	
	1-pole
	stackable
Test plug	
	Standard
Screwdriver	
	Standard
Marking tags	

Type	Qty.	Order No.
ZQV 6SL/2	41 A 60	<b>3077580000</b>
ZQV 6SL/3	41 A 60	<b>3077590000</b>
ZQV 6SL/4	41 A 60	<b>3077600000</b>
SLEP 2C 6	50	<b>3037590000</b>
AEB 35 SC/1	50	<b>1991920000</b>
AEB 35 SCL/1 V0	20	<b>2661280000</b>
ATPG 1.5-10 L	0.2 A 50	<b>1991890000</b>
ATPG 6 MHR	0.2 A 50	<b>1991930000</b>
PS 2.0 MC	20	<b>0310000000</b>
SDIL 1,0X5,5X125	1	<b>2749160000</b>
DEK-A 5/8 MM WS	500	<b>2448860000</b>
WS-A 8/8 MM WS	500	<b>2448930000</b>
DEK 5/8 PLUS MC NE WS	800	<b>1046350000</b>
WS 10/8 PLUS MC NE WS	420	<b>1905950000</b>

Type	Qty.	Order No.
ZQV 6SL/2	41 A 60	<b>3077580000</b>
ZQV 6SL/3	41 A 60	<b>3077590000</b>
ZQV 6SL/4	41 A 60	<b>3077600000</b>
SLEP 3C 6	50	<b>3037600000</b>
AEB 35 SC/1	50	<b>1991920000</b>
AEB 35 SCL/1 V0	20	<b>2661280000</b>
ATPG 1.5-10 L	0.2 A 50	<b>1991890000</b>
ATPG 6 MHR	0.2 A 50	<b>1991930000</b>
PS 2.0 MC	20	<b>0310000000</b>
SDIL 1,0X5,5X125	1	<b>2749160000</b>
DEK-A 5/8 MM WS	500	<b>2448860000</b>
WS-A 8/8 MM WS	500	<b>2448930000</b>
DEK 5/8 PLUS MC NE WS	800	<b>1046350000</b>
WS 10/8 PLUS MC NE WS	420	<b>1905950000</b>


For detailed information on other accessories and application in the online catalogue

For detailed information on other accessories and application in the online catalogue

For detailed information on other accessories and application in the online catalogue

SL4C 6

6 mm<sup>2</sup>

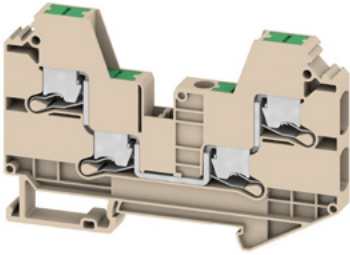

8,2 x 57,6 x 90,6

41 / 10

1,5...10



IEC 60947-7-1

IEC	UL	CSA	EN 60079-7
1000			
41			
6			
		10kA	
		8 kV / 3	
		A5 / V-0	



**Rated connection**

1,5...10 / 1,5...10

1,5...10 / 1,5...6

12 / 1,0 x 5,5 mm

Type	Qty.	Order No.
SL4C 6	50	3037440000
SL4C 6 BL	50	3037450000


Type	Qty.	Order No.
ZQV 6SL/2	41 A 60	3077580000
ZQV 6SL/3	41 A 60	3077590000
ZQV 6SL/4	41 A 60	3077600000
SLEP 4C 6	50	3037640000
AEB 35 SC/1	50	1991920000
AEB 35 SCL/1 V0	20	2661280000
ATPG 1.5-10 L	0.2 A 50	1991890000
ATPG 6 MI-R	0.2 A 50	1991930000
PS 2.0 MC	20	0310000000
SDIL 1,0x5,5x125	1	2749160000
DEKA 5/8 MM WS	500	2448860000
WS-A 8/8 MM WS	500	2448930000
DEK 5/8 PLUS MC NE WS	800	1046350000
WS 10/8 PLUS MC NE WS	420	1905950000

## Spring connection with SNAP IN technology (S-Series)

### Feed-through terminal blocks


#### SL2C 10

10 mm<sup>2</sup>



#### SL3C 10

10 mm<sup>2</sup>



Width/Height/Depth	mm
max. current / max. cond. cross-section	A/mm <sup>2</sup>
Max. clamping range	mm <sup>2</sup>

10,2 x 72 x 48,8

57 / 16

1,5...16



10,2 x 68,5 x 89,1

57 / 16

1,5...16



#### Technical data

Rated data	
Rated voltage	V
Rated current	A
for wire cross-section	mm <sup>2</sup>
Short Circuit Current Rating (SCCR)	
Rated impulse withstand voltage / Pollution severity	
Gauge to IEC 60947-1 / UL 94 flammability rating	
Approvals	
Clamped conductors	
Solid / Stranded	mm <sup>2</sup>
Flexible / Flexible with ferrule	mm <sup>2</sup>
Stripping length / Blade size	mm/-

IEC 60947-7-1

IEC	UL	CSA	EN 60079-7
1000			
57			
10			
	10kA		
	8 kV / 3		
	A6 / V-0		



#### Rated connection

1,5...16 / 1,5...16

2,5...16 / 2,5...10

18 / 1,0 x 5,5 mm

IEC 60947-7-1

IEC	UL	CSA	EN 60079-7
1000			
57			
10			
	10kA		
	8 kV / 3		
	A6 / V-0		



#### Rated connection

1,5...16 / 1,5...16

2,5...16 / 2,5...10

18 / 1,0 x 5,5 mm

#### Note

#### Ordering data

Version	
	dark beige
	Blue

#### Note

Type	Qty.	Order No.
SL2C 10	25	3037500000
SL2C 10 BL	25	3037510000

Type	Qty.	Order No.
SL3C 10	25	3037530000
SL3C 10 BL	25	3037540000

#### Accessories

Plug-in cross-connection	
	2-pole
End plate	
	dark beige
End bracket	
	dark beige, screwable
	dark beige, direct mounting
Test adapter	
	1-pole stackable
Test plug	
	Standard
Screwdriver	
	Standard
Marking tags	


Type	Qty.	Order No.
ZQV 10N/2	57 A 25	2497250000
SLEP 2C 10	20	3037650000
AEB 35 SC/1	50	1991920000
AEB 35 SCL/1 V0	20	2661280000
ATPG 1.5-10 L	0.2 A 50	1991890000
ATPG 6 M-R	0.2 A 50	1991930000
PS 2.0 MC	20	0310000000
SDIL 1,0X5,5X125	1	2749160000
DEK-A 5/8 MM WS	500	2448860000
WS-A 8/8 MM WS	500	2448930000
DEK 5/8 PLUS MC NE WS	800	1046350000
WS 10/8 PLUS MC NE WS	420	1905950000

Type	Qty.	Order No.
ZQV 10N/2	57 A 25	2497250000
SLEP 3C 10	20	3037670000
AEB 35 SC/1	50	1991920000
AEB 35 SCL/1 V0	20	2661280000
ATPG 1.5-10 L	0.2 A 50	1991890000
ATPG 6 M-R	0.2 A 50	1991930000
PS 2.0 MC	20	0310000000
SDIL 1,0X5,5X125	1	2749160000
DEK-A 5/8 MM WS	500	2448860000
WS-A 8/8 MM WS	500	2448930000
DEK 5/8 PLUS MC NE WS	800	1046350000
WS 10/8 PLUS MC NE WS	420	1905950000

For detailed information on other accessories and application in the online catalogue

SL2C 16

16 mm<sup>2</sup>



12,2 x 49,8 x 77,2

76 / 25

2,5...25



IEC 60947-7-1

IEC	UL	CSA	EN 60079-7
1000			
76			
16			
		10kA	
		8 kV / 3	
		A7 / V-0	



**Rated connection**

2,5...25 / 2,5...25

4...25 / 2,5...16

18 / 1,0 x 5,5 mm

Type	Qty.	Order No.
SL2C 16	20	3037560000
SL2C 16 BL	20	3037570000


Type	Qty.	Order No.
ZQV 16N/2	76 A 25	2497290000
SLEP 2C 16	20	3037680000
AEB 35 SC/1	50	1991920000
AEB 35 SCL/1 V0	20	2661280000
ATPG 1.5-10 L	0.2 A 50	1991890000
ATPG 6 MI-R	0.2 A 50	1991930000
PS 2.0 MC	20	0310000000
SDIL 1,0x5,5x125	1	2749160000
DEKA 5/8 MM WS	500	2448860000
WS-A 8/8 MM WS	500	2448930000
DEK 5/8 PLUS MC NE WS	800	1046350000
WS 10/8 PLUS MC NE WS	420	1905950000

**Spring connection with SNAP IN technology (S-Series)**  
**Feed-through terminal blocks**

**S2T 2.5**

**2.5 mm<sup>2</sup>**


**SNAP IN**

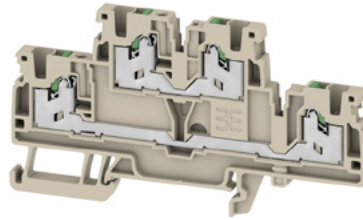

**S2T 2.5 VL**

**2.5 mm<sup>2</sup>**

**SNAP IN**

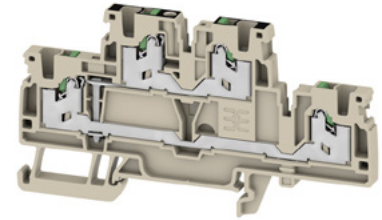

Width/Height/Depth	mm
max. current / max. cond. cross-section	A/mm <sup>2</sup>
Max. clamping range	mm <sup>2</sup>

5.1 x 95 x 52	
<b>22 / 2.5</b>	
<b>0.34...2.5</b>	

5.1 x 95 x 52	
<b>24 / 2.5</b>	
<b>0.34...2.5</b>	

**Technical data**

Rated data	
Rated voltage	V
Rated current	A
for wire cross-section	mm <sup>2</sup>
Short Circuit Current Rating (SCCR)	
Rated impulse withstand voltage / Pollution severity	
Gauge to IEC 60947-1 / UL 94 flammability rating	
Approvals	
Clamped conductors	
Solid / Stranded	mm <sup>2</sup>
Flexible / Flexible with ferrule	mm <sup>2</sup>
Stripping length / Blade size	mm/-

IEC 60947-7-1

IEC	UL	CSA	EN 60079-7
800	600		
22	20		
2.5	AWG 22...12		
100kA			
8 kV / 3			
A2 / V-0			

Rated connection	
0.5...2.5 / 0.5...2.5	
0.5...2.5 / 0.5...2.5	
10 / 0.6 x 3.5 mm	

IEC 60947-7-1

IEC	UL	CSA	EN 60079-7
800	600		
22	20		
2.5	AWG 22...12		
100kA			
8 kV / 3			
A2 / V-0			

Rated connection	
0.5...2.5 / 0.5...2.5	
0.5...2.5 / 0.5...2.5	
10 / 0.6 x 3.5 mm	

**Note**

**Ordering data**

Version	
	dark beige
	Blue
	Orange

**Note**

Type	Qty.	Order No.
S2T 2.5	50	<b>2902380000</b>
S2T 2.5 BL	50	<b>2902390000</b>
S2T 2.5 OR	50	<b>2902400000</b>

Type	Qty.	Order No.
S2T 2.5 VL	50	<b>2902430000</b>
S2T 2.5 VL BL	50	<b>2902440000</b>
S2T 2.5 VL OR	50	<b>2902450000</b>

**Accessories**

Plug-in cross-connection	
	2-pole
	10-pole
	2-pole
	10-pole
Vertical jumpers	
	1-pole
End plate	
	dark beige
	blue
End bracket	
	dark beige, screwable
	dark beige, direct mounting
Test adapter	
	1-pole
	stackable
	3-pole
	5-pole
Test plug	
Screwdriver	
	Standard
Marking tags	

Type	Qty.	Order No.
ZQV 2.5N/2	24 A 60	<b>1527540000</b>
ZQV 2.5N/10	24 A 20	<b>1527690000</b>
ZVQ 2.5/1.5	24 A 50	<b>1720700000</b>
SEP 2T 2.5	20	<b>2913480000</b>
SEP 2T 2.5 BL	20	<b>2913490000</b>
AEB 35 SC/1	50	<b>1991920000</b>
AEB 35 SCL/1 VO	20	<b>2661280000</b>
ATPG 1.5-10 L	0.2 A 50	<b>1991890000</b>
ATPG 2.5 MHR	0.2 A 50	<b>1991960000</b>
ATPG 2.5/3	0.2 A 25	<b>2041190000</b>
ATPG 2.5/5	0.2 A 25	<b>2041180000</b>
PS 2.0 MC	20	<b>0310000000</b>
SDIL 0,6X3,5X100	1	<b>2749140000</b>
DEK 5/5 PLUS MC NE WS	1000	<b>1854490000</b>
DEK 5/5 MM WS	800	<b>2007110000</b>
WS 8/5 MM WS	800	<b>2007150000</b>
WS 10/5 M PLUS MC NE WS	600	<b>2003770000</b>
SNAPMARK I	50	<b>1805880000</b>


Type	Qty.	Order No.
ZQV 2.5N/2	24 A 60	<b>1527540000</b>
ZQV 2.5N/10	24 A 20	<b>1527690000</b>
SEP 2T 2.5	20	<b>2913480000</b>
SEP 2T 2.5 BL	20	<b>2913490000</b>
AEB 35 SC/1	50	<b>1991920000</b>
AEB 35 SCL/1 VO	20	<b>2661280000</b>
ATPG 1.5-10 L	0.2 A 50	<b>1991890000</b>
ATPG 2.5 MHR	0.2 A 50	<b>1991960000</b>
ATPG 2.5/3	0.2 A 25	<b>2041190000</b>
ATPG 2.5/5	0.2 A 25	<b>2041180000</b>
PS 2.0 MC	20	<b>0310000000</b>
SDIL 0,6X3,5X100	1	<b>2749140000</b>
DEK 5/5 PLUS MC NE WS	1000	<b>1854490000</b>
DEK 5/5 MM WS	800	<b>2007110000</b>
WS 8/5 MM WS	800	<b>2007150000</b>
WS 10/5 M PLUS MC NE WS	600	<b>2003770000</b>
SNAPMARK I	50	<b>1805880000</b>

For detailed information on other accessories and application in the online catalogue

S2T 2.5 N-FT

2.5 mm<sup>2</sup>

**SNAP IN**

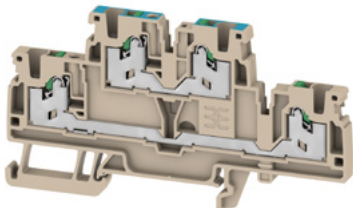

5.1 x 95 x 52  
22 / 2.5  
0.34...2.5



IEC 60947-7-1

IEC	UL	CSA	EN 60079-7
800	600		
22	20		
2.5	AWG 22...12		
	100kA		
	8 kV / 3		
	A2 / V-0		



**Rated connection**

0.5...2.5 / 0.5...2.5


0.5...2.5 / 0.5...2.5

10 / 0.6 x 3.5 mm

S2T 2.5 FT-PE

2.5 mm<sup>2</sup>

**SNAP IN**

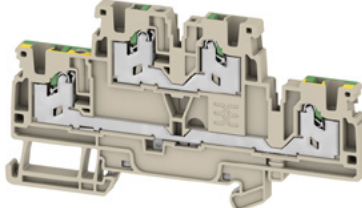

5.1 x 95 x 52  
24 / 2.5  
0.34...2.5



IEC 60947-7-1, IEC 60947-7-2

IEC	UL	CSA	EN 60079-7
800	600		
24	20		
2.5	AWG 22...12		
	100kA		
	8 kV / 3		
	A2 / V-0		



**Rated connection**

0.5...2.5 / 0.5...2.5

0.5...2.5 / 0.5...2.5

10 / 0.6 x 3.5 mm

Type	Qty.	Order No.
S2T 2.5 N-FT	50	2902420000

Type	Qty.	Order No.
S2T 2.5 FT-PE	50	2902410000

Type	Qty.	Order No.
ZQV 2.5N/2	24 A 60	1527540000
ZQV 2.5N/10	24 A 20	1527690000
ZVQ 2.5/1.5	24 A 50	1720700000
SEP 2T 2.5	20	2913480000
SEP 2T 2.5 BL	20	2913490000
AEB 35 SC/1	50	1991920000
AEB 35 SCL/1 VO	20	2661280000
ATPG 1.5-10 L	0,2 A 50	1991890000
ATPG 2.5 MI-R	0,2 A 50	1991960000
ATPG 2.5/3	0,2 A 25	2041190000
ATPG 2.5/5	0,2 A 25	2041180000
PS 2.0 MC	20	0310000000
SDIL 0,6X3,5X100	1	2749140000
DEK 5/5 PLUS MC NE WS	1000	1854490000
DEK 5/5 MM WS	800	2007110000
WS 8/5 MM WS	800	2007150000
WS 10/5 M PLUS MC NE WS	600	2003770000
SNAPMARK I	50	1805880000

Type	Qty.	Order No.
ZQV 2.5N/2	24 A 60	1527540000
ZQV 2.5N/10	24 A 20	1527690000
SEP 2T 2.5	20	2913480000
SEP 2T 2.5 BL	20	2913490000
AEB 35 SC/1	50	1991920000
AEB 35 SCL/1 VO	20	2661280000
ATPG 1.5-10 L	0,2 A 50	1991890000
ATPG 2.5 MI-R	0,2 A 50	1991960000
ATPG 2.5/3	0,2 A 25	2041190000
ATPG 2.5/5	0,2 A 25	2041180000
PS 2.0 MC	20	0310000000
SDIL 0,6X3,5X100	1	2749140000
DEK 5/5 PLUS MC NE WS	1000	1854490000
DEK 5/5 MM WS	800	2007110000
WS 8/5 MM WS	800	2007150000
WS 10/5 M PLUS MC NE WS	600	2003770000
SNAPMARK I	50	1805880000

**Spring connection with SNAP IN technology (S-Series)**  
**Feed-through terminal blocks**

**S3T 2.5**

**2.5 mm<sup>2</sup>**

**SNAP IN**



Q2  
2025

**S3T 2.5 VL**

**2.5 mm<sup>2</sup>**

**SNAP IN**



Q2  
2025

Width/Height/Depth	mm
max. current / max. cond. cross-section	A/mm <sup>2</sup>
Max. clamping range	mm <sup>2</sup>

5.1 x 116 x 64.5
<b>22 / 2.5</b>
<b>0.34...2.5</b>

5.1 x 116 x 64.5
<b>24 / 2.5</b>
<b>0.34...2.5</b>

**Technical data**

Rated data	
Rated voltage	V
Rated current	A
for wire cross-section	mm <sup>2</sup>
Short Circuit Current Rating (SCCR)	
Rated impulse withstand voltage / Pollution severity	
Gauge to IEC 60947-1 / UL 94 flammability rating	
Approvals	
Clamped conductors	
Solid / Stranded	mm <sup>2</sup>
Flexible / Flexible with ferrule	mm <sup>2</sup>
Stripping length / Blade size	mm/-
Note	

IEC	UL	CSA	EN 60079-7
800			
22			
2.5			
		10kA	
		8 kV / 3	
		A3 / V-0	
CE			
Rated connection			
0.5...2.5 / 0.5...2.5			
0.5...2.5 / 0.5...2.5			
/ 0.6 x 3.5 mm			
Note			

IEC 60947-7-1			
IEC	UL	CSA	EN 60079-7
800			
24			
2.5			
		10kA	
		8 kV / 3	
		A3 / V-0	
CE			
Rated connection			
0.5...2.5 / 0.5...2.5			
0.5...2.5 / 0.5...2.5			
10 / 0.6 x 3.5 mm			
Note			

**Ordering data**

Version	
	dark beige
	Blue
	Orange
Note	

Type	Qty.	Order No.
S3T 2.5		<b>2902530000</b>
S3T 2.5 BL		<b>2902540000</b>
Note		

Type	Qty.	Order No.
S3T 2.5 VL		<b>2902570000</b>
S3T 2.5 VL BL		<b>2902580000</b>
Note		

**Accessories**

Plug-in cross-connection	
	2-pole
	10-pole
	2-pole
	10-pole
Vertical jumpers	
	1-pole
End plate	
	dark beige
	blue
End bracket	
	dark beige, screwable
	dark beige, direct mounting
Test adapter	
	1-pole
	stackable
	3-pole
	5-pole
Test plug	
Screwdriver	
	Standard
Marking tags	

Type	Qty.	Order No.
ZQV 2.5N/2	24 A 60	<b>1527540000</b>
ZQV 2.5N/10	24 A 20	<b>1527690000</b>
Vertical jumpers		
ZVQ 2.5/1.5	24 A 50	<b>1720700000</b>
End plate		
SEP 3T 2.5		<b>2902630000</b>
SEP 3T 2.5 BL		<b>2902640000</b>
End bracket		
AEB 35 SC/1	50	<b>1991920000</b>
AEB 35 SCL/1 VO	20	<b>2661280000</b>
Test adapter		
ATPG 1.5-10 L	0.2 A 50	<b>1991890000</b>
ATPG 2.5 MHR	0.2 A 50	<b>1991960000</b>
ATPG 2.5/3	0.2 A 25	<b>2041190000</b>
ATPG 2.5/5	0.2 A 25	<b>2041180000</b>
Test plug		
PS 2.0 MC	20	<b>0310000000</b>
Screwdriver		
SDIL 0,6X3,5X100	1	<b>2749140000</b>
Marking tags		
DEK 5/5 PLUS MC NE WS	1000	<b>1854490000</b>
DEK 5/5 MM WS	800	<b>2007110000</b>
WS 8/5 MM WS	800	<b>2007150000</b>
WS 10/5 M PLUS MC NE WS	600	<b>2003770000</b>
SNAPMARK I	50	<b>1805880000</b>
Note		


Type	Qty.	Order No.
ZQV 2.5N/2	24 A 60	<b>1527540000</b>
ZQV 2.5N/10	24 A 20	<b>1527690000</b>
Vertical jumpers		
ZVQ 2.5/1.5	24 A 50	<b>1720700000</b>
End plate		
SEP 3T 2.5		<b>2902630000</b>
SEP 3T 2.5 BL		<b>2902640000</b>
End bracket		
AEB 35 SC/1	50	<b>1991920000</b>
AEB 35 SCL/1 VO	20	<b>2661280000</b>
Test adapter		
ATPG 1.5-10 L	0.2 A 50	<b>1991890000</b>
ATPG 2.5 MHR	0.2 A 50	<b>1991960000</b>
ATPG 2.5/3	0.2 A 25	<b>2041190000</b>
ATPG 2.5/5	0.2 A 25	<b>2041180000</b>
Test plug		
PS 2.0 MC	20	<b>0310000000</b>
Screwdriver		
SDIL 0,6X3,5X100	1	<b>2749140000</b>
Marking tags		
DEK 5/5 PLUS MC NE WS	1000	<b>1854490000</b>
DEK 5/5 MM WS	800	<b>2007110000</b>
WS 8/5 MM WS	800	<b>2007150000</b>
WS 10/5 M PLUS MC NE WS	600	<b>2003770000</b>
SNAPMARK I	50	<b>1805880000</b>
Note		

For detailed information on other accessories and application in the online catalogue

S3T 2.5 FT-FT-PE


2.5 mm<sup>2</sup>

SNAP IN



Q2  
2025

5.1 x 116 x 64.5  
24 / 2.5  
0.34...2.5



IEC 60947-7-1 (-7-2)

IEC	UL	CSA	EN 60079-7
800			
24			
2.5			
	10kA		
	6 kV / 3		
	A3 / V-0		




Rated connection

0.5...2.5 / 0.5...2.5  
0.5...2.5 / 0.5...2.5  
10 / 0.6 x 3.5 mm

S3T 2.5 N-FT-PE


2.5 mm<sup>2</sup>

SNAP IN



Q2  
2025

5.1 x 116 x 64.5  
24 / 2.5  
0.34...2.5



IEC 60947-7-1 (-7-2)

IEC	UL	CSA	EN 60079-7
800			
24			
2.5			
	10kA		
	8 kV / 3		
	A3 / V-0		



Rated connection

0.5...2.5 / 0.5...2.5  
0.5...2.5 / 0.5...2.5  
10 / 0.6 x 3.5 mm

Type	Qty.	Order No.
S3T 2.5 FT-FT-PE		2902550000

Type	Qty.	Order No.
S3T 2.5 N-FT-PE		2902560000

Type	Qty.	Order No.
ZQV 2.5N/2	24 A 60	1527540000
ZQV 2.5N/10	24 A 20	1527690000
ZVQ 2.5/1.5	24 A 50	1720700000
SEP 3T 2.5		2902630000
SEP 3T 2.5 BL		2902640000
AEB 35 SC/1	50	1991920000
AEB 35 SCL/1 VO	20	2661280000
ATPG 1.5-10 L	0.2 A 50	1991890000
ATPG 2.5 MI-R	0.2 A 50	1991960000
ATPG 2.5/3	0.2 A 25	2041190000
ATPG 2.5/5	0.2 A 25	2041180000
PS 2.0 MC	20	0310000000
SDIL 0,6X3,5X100	1	2749140000
DEK 5/5 PLUS MC NE WS	1000	1854490000
DEK 5/5 MM WS	800	2007110000
WS 8/5 MM WS	800	2007150000
WS 10/5 M PLUS MC NE WS	600	2003770000
SNAPMARK I	50	1805880000

Type	Qty.	Order No.
ZQV 2.5N/2	24 A 60	1527540000
ZQV 2.5N/10	24 A 20	1527690000
ZVQ 2.5/1.5	24 A 50	1720700000
SEP 3T 2.5		2902630000
SEP 3T 2.5 BL		2902640000
AEB 35 SC/1	50	1991920000
AEB 35 SCL/1 VO	20	2661280000
ATPG 1.5-10 L	0.2 A 50	1991890000
ATPG 2.5 MI-R	0.2 A 50	1991960000
ATPG 2.5/3	0.2 A 25	2041190000
ATPG 2.5/5	0.2 A 25	2041180000
PS 2.0 MC	20	0310000000
SDIL 0,6X3,5X100	1	2749140000
DEK 5/5 PLUS MC NE WS	1000	1854490000
DEK 5/5 MM WS	800	2007110000
WS 8/5 MM WS	800	2007150000
WS 10/5 M PLUS MC NE WS	600	2003770000
SNAPMARK I	50	1805880000

**Spring connection with SNAP IN technology (S-Series)**  
**PE terminal blocks**

**S2C 2.5 PE**



**2.5 mm<sup>2</sup>**

**S3C 2.5 PE**

**2.5 mm<sup>2</sup>**

**SNAP IN**

**SNAP IN**



Width/Height/Depth	mm
max. current / max. cond. cross-section	-/mm <sup>2</sup>
Max. clamping range	mm <sup>2</sup>

5.1 x 59 x 38	
/ 2.5	
0.34...2.5	

5.1 x 71.5 x 38	
/ 2.5	
0.34...2.5	

**Technical data**

Rated data	
for wire cross-section	mm <sup>2</sup>
Rated voltage to adjoining terminal	V
Rated impulse withstand voltage to adjacent terminal	kV
Short Circuit Current Rating (SCCR)	
Rated short-time current	
Pollution severity	
Gauge to IEC 60947-1 / UL 94 flammability rating	
Approvals	
Clamped conductors	
Solid / Stranded	mm <sup>2</sup>
Flexible / Flexible with ferrule	mm <sup>2</sup>
Stripping length / Blade size	mm/-
<b>Note</b>	

IEC 60947-7-2			
IEC	UL	CSA	EN 60079-7
2.5	AWG 22...12	AWG 20...14	
800			
8			
	100kA		
	300 A (2.5 mm <sup>2</sup> )		
	3		
	A2 / V-0		
Rated connection			
0.5...2.5 / 0.5...2.5			
0.5...2.5 / 0.34...2.5			
10 / 0.6 x 3.5 mm			
<b>Note</b>			

IEC 60947-7-2			
IEC	UL	CSA	EN 60079-7
2.5	AWG 22...12	AWG 20...14	
800			
8			
	100kA		
	300 A (2.5 mm <sup>2</sup> )		
	3		
	A2 / V-0		
Rated connection			
0.5...2.5 / 0.5...2.5			
0.5...2.5 / 0.34...2.5			
10 / 0.6 x 3.5 mm			
<b>Note</b>			

**Ordering data**

Version	
	Green/yellow
<b>Note</b>	

Type	Qty.	Order No.
S2C 2.5 PE	50	2674560000
<b>Note</b>		

Type	Qty.	Order No.
S3C 2.5 PE	50	2674570000
<b>Note</b>		

**Accessories**

<b>End plate</b>	dark beige blue
<b>End bracket</b>	dark beige, screwable dark beige, direct mounting
<b>Test adapter</b>	1-pole stackable 3-pole 5-pole
<b>Test plug</b>	
<b>Screwdriver</b>	Standard
<b>Marking tags</b>	

Type	Qty.	Order No.
SEP 2C 2.5	20	2751080000
AEB 35 SC/1	50	1991920000
AEB 35 SCL/1 V0	20	2661280000
ATPG 1.5-10 L	0.2 A 50	1991890000
ATPG 2.5 MHR	0.2 A 50	1991960000
ATPG 2.5/3	0.2 A 25	2041190000
ATPG 2.5/5	0.2 A 25	2041180000
PS 2.0 MC	20	0310000000
SDIL 0,6X3,5X100	1	2749140000
DEK 5/5 PLUS MC NE WS	1000	1854490000
DEK 5/5 MM WS	800	2007110000
WS 8/5 MM WS	800	2007150000
WS 10/5 M PLUS MC NE WS	600	2003770000


Type	Qty.	Order No.
SEP 3C 2.5	20	2751090000
AEB 35 SC/1	50	1991920000
AEB 35 SCL/1 V0	20	2661280000
ATPG 1.5-10 L	0.2 A 50	1991890000
ATPG 2.5 MHR	0.2 A 50	1991960000
ATPG 2.5/3	0.2 A 25	2041190000
ATPG 2.5/5	0.2 A 25	2041180000
PS 2.0 MC	20	0310000000
SDIL 0,6X3,5X100	1	2749140000
DEK 5/5 PLUS MC NE WS	1000	1854490000
DEK 5/5 MM WS	800	2007110000
WS 8/5 MM WS	800	2007150000
WS 10/5 M PLUS MC NE WS	600	2003770000

For detailed information on other accessories and application in the online catalogue


S4C 2.5 PE

2.5 mm<sup>2</sup>

**SNAP IN**



5.1 x 84 x 38  
/ 2.5  
0.34...2.5



IEC 60947-7-2

IEC	UL	CSA	EN 60079-7
2.5	AWG 22...12	AWG 20...14	
800			
8			
	100kA		
	300 A (2.5 mm <sup>2</sup> )		
	3		
	A2 / V-0		

CE cRU us

**Rated connection**  
0.5...2.5 / 0.5...2.5  
0.5...2.5 / 0.34...2.5  
10 / 0.6 x 3.5 mm

Type	Qty.	Order No.
S4C 2.5 PE	50	2674580000

Type	Qty.	Order No.
SEP 4C 2.5	20	2751100000
AEB 35 SC/1	50	1991920000
AEB 35 SCL/1 V0	20	2661280000
ATPG 1.5-10 L	0.2 A 50	1991890000
ATPG 2.5 MI-R	0.2 A 50	1991960000
ATPG 2.5/3	0.2 A 25	2041190000
ATPG 2.5/5	0.2 A 25	2041180000
PS 2.0 MC	20	0310000000
SDIL 0,6X3,5X100	1	2749140000
DEK 5/5 PLUS MC NE WS	1000	1854490000
DEK 5/5 MM WS	800	2007110000
WS 8/5 MM WS	800	2007150000
WS 10/5 M PLUS MC NE WS	600	2003770000


## Spring connection with SNAP IN technology (S-Series)

### PE terminal blocks

S2C 4 PE


4 mm<sup>2</sup>

**SNAP IN**



Width/Height/Depth	mm
max. current / max. cond. cross-section	-/mm <sup>2</sup>
Max. clamping range	mm <sup>2</sup>

6.1 x 62 x 41.5  
/ 4  
0.75...4



#### Technical data

Rated data	
for wire cross-section	mm <sup>2</sup>
Rated voltage to adjoining terminal	V
Rated impulse withstand voltage to adjacent terminal	kV
Short Circuit Current Rating (SCCR)	
Rated short-time current	
Pollution severity	
Gauge to IEC 60947-1 / UL 94 flammability rating	
Approvals	
Clamped conductors	
Solid / Stranded	mm <sup>2</sup>
Flexible / Flexible with ferrule	mm <sup>2</sup>
Stripping length / Blade size	mm/-

IEC 60947-7-2

IEC	UL	CSA	EN 60079-7
4	AWG 20...10		
1000			
8			
	100kA		
	480 A (4 mm <sup>2</sup> )		
	3		
	A4 / V-0		

Rated connection	
0.75...4 / 0.75...4	
0.75...4 / 0.75...4	
12 / 0.6 x 3.5 mm	

#### Note

#### Ordering data

Version	
	Green/yellow
Note	

#### Accessories

End plate	
	dark beige blue
End bracket	
	dark beige, screwable dark beige, direct mounting
Test adapter	
	1-pole stackable 3-pole 5-pole
Test plug	
Screwdriver	
	Standard
Marking tags	


Type	Qty.	Order No.
S2C 4 PE	50	2874880000
Accessories		
SEP 2C 4	20	2874790000
AEB 35 SC/1	50	1991920000
AEB 35 SCL/1 VO	20	2661280000
ATPG 1.5-10 L	0.2 A 50	1991890000
ATPG 4 MHR	0.2 A 50	1991860000
PS 2.0 MC	20	0310000000
SDIL 0,6X3,5X100	1	2749140000
WS 10/6 M PLUS MC NE WS	600	2003780000
WS 8/6 MM WS	600	2007160000
DEK 5/6 MM WS	600	2007120000
DEK 5/6 PLUS MC NE WS	1000	1011320000

For detailed information on other accessories and application in the online catalogue


S3C 4 PE

4 mm<sup>2</sup>

**SNAP IN**



6.1 x 78 x 41.5  
/ 4  
0.75...4



IEC 60947-7-2

IEC	UL	CSA	EN 60079-7
4	AWG 20...10		
1000			
8			
	100kA		
	480 A (4 mm <sup>2</sup> )		
	3		
	A4 / V-0		

Rated connection	
0.75...4 / 0.75...4	
0.75...4 / 0.75...4	
12 / 0.6 x 3.5 mm	

#### Note


Type	Qty.	Order No.
S3C 4 PE	50	2874890000

Type	Qty.	Order No.
SEP 3C 4	20	2874800000
AEB 35 SC/1	50	1991920000
AEB 35 SCL/1 VO	20	2661280000
ATPG 1.5-10 L	0.2 A 50	1991890000
ATPG 2.5 MHR	0.2 A 50	1991960000
PS 2.0 MC	20	0310000000
SDIL 0,6X3,5X100	1	2749140000
DEK 5/5 PLUS MC NE WS	1000	1854490000
DEK 5/5 MM WS	800	2007110000
WS 8/5 MM WS	800	2007150000
WS 10/5 M PLUS MC NE WS	600	2003770000

S4C 4 PE

4 mm<sup>2</sup>


**SNAP IN**



6.1 x 94 x 41.5

/ 4

0.75...4



IEC 60947-7-2

IEC	UL	CSA	EN 60079-7
4	AWG 20...10		
1000			
8			
	100kA		
	480 A (4 mm <sup>2</sup> )		
	3		
	A4 / V-0		



**Rated connection**

0.75...4 / 0.75...4

0.75...4 / 0.75...4

12 / 0.6 x 3.5 mm

Type	Qty.	Order No.
S4C 4 PE	50	2874900000


Type	Qty.	Order No.	
SEP 4C 4	20	2874810000	
AEB 35 SC/1	50	1991920000	
AEB 35 SCL/1 VO	20	2661280000	
ATPG 1.5-10 L	0.2 A	50	1991890000
ATPG 4 MI-R	0.2 A	50	1991860000
PS 2.0 MC	20	0310000000	
SDIL 0,6X3,5X100	1	2749140000	
WS 10/6 M PLUS MC NE WS	600	2003780000	
WS 8/6 MM WS	600	2007160000	
DEK 5/6 MM WS	600	2007120000	
DEK 5/6 PLUS MC NE WS	1000	1011320000	

## Spring connection with SNAP IN technology (S-Series)

### PE terminal blocks


#### SL2C 6 PE

6 mm<sup>2</sup>




#### SL3C 6 PE

6 mm<sup>2</sup>



Width/Height/Depth	mm
max. current / max. cond. cross-section	-/mm <sup>2</sup>
Max. clamping range	mm <sup>2</sup>

10,2 x 72 x 48,8
/ 16
1,5...16





8,2 x 57,6 x 76,7
/ 10
1,5...10



#### Technical data

Rated data	
for wire cross-section	mm <sup>2</sup>
Rated voltage to adjoining terminal	V
Rated impulse withstand voltage to adjacent terminal	kV
Short Circuit Current Rating (SCCR)	
Rated short-time current	
Pollution severity	
Gauge to IEC 60947-1 / UL 94 flammability rating	
Approvals	
Clamped conductors	
Solid / Stranded	mm <sup>2</sup>
Flexible / Flexible with ferrule	mm <sup>2</sup>
Stripping length / Blade size	mm/-

IEC 60947-7-2			
IEC	UL	CSA	EN 60079-7
6			
1000			
8			
		10kA	
		720 A (6 mm <sup>2</sup> )	
		3	
		A5 / V-0	
CE 			
Rated connection			
1,5...10 / 1,5..10			
1,5...10 / 1,5..6			
12 / 1,0 x 5,5 mm			

IEC 60947-7-2			
IEC	UL	CSA	EN 60079-7
6			
1000			
8			
		10kA	
		720 A (6 mm <sup>2</sup> )	
		3	
		A5 / V-0	
CE 			
Rated connection			
1,5...10 / 1,5..10			
1,5...10 / 1,5..6			
12 / 1,0 x 5,5 mm			

Note

#### Ordering data

Version	
	Green/yellow
Note	

Type	Qty.	Order No.
SL2C 6 PE	50	3037400000

Type	Qty.	Order No.
SL3C 6 PE	50	3037430000

#### Accessories

End plate	
	dark beige
End bracket	
	dark beige, screwable
	dark beige, direct mounting
Test adapter	
	1-pole
	stackable
	3-pole
	5-pole
Test plug	
Screwdriver	
	Standard
Marking tags	


Type	Qty.	Order No.	
SLEP 2C 6	50	3037590000	
AEB 35 SC/1	50	1991920000	
AEB 35 SCL/1 V0	20	2661280000	
ATPG 1.5-10 L	0.2 A	50	1991890000
ATPG 6 MHR	0.2 A	50	1991930000
PS 2.0 MC	20	0310000000	
SDIL 1,0X5,5X125	1	2749160000	
DEK-A 5/8 MM WS	500	2448860000	
WS-A 8/8 MM WS	500	2448930000	
DEK 5/8 PLUS MC NE WS	800	1046350000	
WS 10/8 PLUS MC NE WS	420	1905950000	

Type	Qty.	Order No.	
SLEP 3C 6	50	3037600000	
AEB 35 SC/1	50	1991920000	
AEB 35 SCL/1 V0	20	2661280000	
ATPG 1.5-10 L	0.2 A	50	1991890000
ATPG 6 MHR	0.2 A	50	1991930000
PS 2.0 MC	20	0310000000	
SDIL 1,0X5,5X125	1	2749160000	
DEK-A 5/8 MM WS	500	2448860000	
WS-A 8/8 MM WS	500	2448930000	
DEK 5/8 PLUS MC NE WS	800	1046350000	
WS 10/8 PLUS MC NE WS	420	1905950000	


For detailed information on other accessories and application in the online catalogue

SL4C 6 PE

6 mm<sup>2</sup>

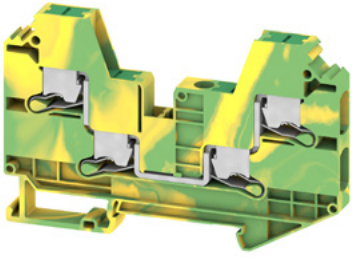

8,2 x 57,6 x 90,6  
/ 10  
1,5...10



IEC 60947-7-2

IEC	UL	CSA	EN 60079-7
6			
1000			
8			
	10A		
	720 A (6 mm <sup>2</sup> )		
	3		
	A5 / V-0		



**Rated connection**

1,5...10 / 1,5..10  
1,5...10 / 1,5..6  
12 / 1,0 x 5,5 mm

Type	Qty.	Order No.
SL4C 6 PE	50	3037460000


Type	Qty.	Order No.
SLEP 4C 6	50	3037640000
AEB 35 SC/1	50	1991920000
AEB 35 SCL/1 VO	20	2661280000
ATPG 1.5-10 L	0.2 A 50	1991890000
ATPG 6 MI-R	0.2 A 50	1991930000
PS 2.0 MC	20	0310000000
SDIL 1,0X5,5X125	1	2749160000
DEK-A 5/8 MM WS	500	2448860000
WS-A 8/8 MM WS	500	2448930000
DEK 5/8 PLUS MC NE WS	800	1046350000
WS 10/8 PLUS MC NE WS	420	1905950000

## Spring connection with SNAP IN technology (S-Series)

### PE terminal blocks

#### SL2C 10 PE

10 mm<sup>2</sup>




#### SL3C 10 PE

10 mm<sup>2</sup>




Width/Height/Depth	mm
max. current / max. cond. cross-section	-/mm <sup>2</sup>
Max. clamping range	mm <sup>2</sup>

10,2 x 72 x 48,8
/ 16
1,5...16





10,2 x 68,5 x 89,1
/ 16
1,5...16



#### Technical data

Rated data	
for wire cross-section	mm <sup>2</sup>
Rated voltage to adjoining terminal	V
Rated impulse withstand voltage to adjacent terminal	kV
Short Circuit Current Rating (SCCR)	
Rated short-time current	
Pollution severity	
Gauge to IEC 60947-1 / UL 94 flammability rating	
Approvals	
Clamped conductors	
Solid / Stranded	mm <sup>2</sup>
Flexible / Flexible with ferrule	mm <sup>2</sup>
Stripping length / Blade size	mm/-

IEC 60947-7-2			
IEC	UL	CSA	EN 60079-7
10			
1000			
8			
	10kA		
	1200 A (10 mm <sup>2</sup> )		
	3		
	A6 / V-0		
			
Rated connection			
1,5...16 / 1,5...16			
2,5...16 / 2,5...10			
18 / 1,0 x 5,5 mm			

IEC 60947-7-2			
IEC	UL	CSA	EN 60079-7
10			
1000			
8			
	10kA		
	1200 A (10 mm <sup>2</sup> )		
	3		
	A6 / V-0		
			
Rated connection			
1,5...16 / 1,5...16			
2,5...16 / 2,5...10			
18 / 1,0 x 5,5 mm			

Note

#### Ordering data

Version	
	Green/yellow
Note	

Type	Qty.	Order No.
SL2C 10 PE	25	3037520000

Type	Qty.	Order No.
SL3C 10 PE	25	3037550000

#### Accessories

End plate	dark beige
End bracket	dark beige, screwable dark beige, direct mounting
Test adapter	1-pole stackable 3-pole 5-pole
Test plug	
Screwdriver	Standard
Marking tags	


Type	Qty.	Order No.
SLEP 2C 10	20	3037650000
AEB 35 SC/1	50	1991920000
AEB 35 SCL/1 V0	20	2661280000
ATPG 1.5-10 L	0.2 A 50	1991890000
PS 2.0 MC	20	0310000000
SDIL 1,0X5,5X125	1	2749160000
DEK 5/5 PLUS MC NE WS	1000	1854490000
DEK 5/8 PLUS MC NE WS	800	1046350000
WS 10/8 PLUS MC NE WS	420	1905950000

Type	Qty.	Order No.
SLEP 3C 10	20	3037670000
AEB 35 SC/1	50	1991920000
AEB 35 SCL/1 V0	20	2661280000
ATPG 1.5-10 L	0.2 A 50	1991890000
PS 2.0 MC	20	0310000000
SDIL 1,0X5,5X125	1	2749160000
DEK 5/5 PLUS MC NE WS	1000	1854490000
DEK 5/8 PLUS MC NE WS	800	1046350000
WS 10/8 PLUS MC NE WS	420	1905950000


For detailed information on other accessories and application in the online catalogue

SL2C 16 PE

16 mm<sup>2</sup>



12,2 x 49,8 x 77,2  
/ 25  
2,5...25



IEC 60947-7-2

IEC	UL	CSA	EN 60079-7
16			
1000			
8			
	10kA		
	1920 A (16 mm <sup>2</sup> )		
	3		
	A7 / V-0		



Rated connection

2,5...25 / 2,5...25

4...25 / 2,5...16

18 / 1,0 x 5,5 mm

Type	Qty.	Order No.
SL2C 16 PE	20	3037580000

Type	Qty.	Order No.
SLEP 2C 16	20	3037680000
AEB 35 SC/1	50	1991920000
AEB 35 SCL/1 V0	20	2661280000
ATPG 1.5-10 L	0,2 A 50	1991890000
PS 2.0 MC	20	0310000000
SDIL 1,0x5,5x125	1	2749160000
DEK 5/5 PLUS MC NE WS	1000	1854490000
WS-A 8/12 MM WS	300	2619900000
DEK 5/8 PLUS MC NE WS	800	1046350000
WS 10/8 PLUS MC NE WS	420	1905950000


## Spring connection with SNAP IN technology (S-Series)

### PE terminal blocks

#### S2T 2.5 PE

2.5 mm<sup>2</sup>

### SNAP IN



Width/Height/Depth	mm
max. current / max. cond. cross-section	-/mm <sup>2</sup>
Max. clamping range	mm <sup>2</sup>

5.1 x 95 x 52	
/ 2.5	
0.34...2.5	

#### Technical data

Rated data	
for wire cross-section	mm <sup>2</sup>
Rated voltage to adjoining terminal	V
Rated impulse withstand voltage to adjacent terminal	kV
Short Circuit Current Rating (SCCR)	
Rated short-time current	
Pollution severity	
Gauge to IEC 60947-1 / UL 94 flammability rating	
Approvals	

IEC 60947-7-2

IEC	UL	CSA	EN 60079-7
2.5	AWG 22...12		
800			
6			
	100kA		
	300 A (2.5 mm <sup>2</sup> )		
	3		
	A2 / V-0		

#### Clamped conductors

Solid / Stranded	mm <sup>2</sup>
Flexible / Flexible with ferrule	mm <sup>2</sup>
Stripping length / Blade size	mm/-

CE UK US CSA

#### Rated connection

0.5...2.5 / 0.5...2.5
0.5...2.5 / 0.5...2.5
10 / 0.6 x 3.5 mm

#### Note

#### Ordering data

Version	
	Green/yellow
Note	

Type	Qty.	Order No.
S2T 2.5 PE	50	2902460000

#### Accessories

End plate	
	dark beige blue
End bracket	
	dark beige, screwable dark beige, direct mounting
Test adapter	
	1-pole stackable 3-pole 5-pole
Test plug	
Screwdriver	
	Standard
Marking tags	


Type	Qty.	Order No.
SEP 2T 2.5	20	2913480000
AEB 35 SC/1	50	1991920000
AEB 35 SCL/1 V0	20	2661280000
ATPG 1.5-10 L	0.2 A 50	1991890000
ATPG 2.5 MHR	0.2 A 50	1991960000
PS 2.0 MC	20	0310000000
SDIL 0,6X3,5X100	1	2749140000
DEK 5/5 PLUS MC NE WS	1000	1854490000
DEK 5/5 MM WS	800	2007110000
WS 8/5 MM WS	800	2007150000
WS 10/5 M PLUS MC NE WS	600	2003770000
SNAPMARK I	50	1805880000

For detailed information on other accessories and application in the online catalogue

#### S3T 2.5 PE

2.5 mm<sup>2</sup>

### SNAP IN



Q2  
2025

5.1 x 116 x 64.5	
/ 2.5	
0.34...2.5	

IEC 60947-7-2

IEC	UL	CSA	EN 60079-7
2.5			
800			
8			
	10kA		
	A3 / V-0		

CE UK US CSA

#### Rated connection

0.5...2.5 / 0.5...2.5
0.5...2.5 / 0.5...2.5
10 / 0.6 x 3.5 mm

#### Note

Type	Qty.	Order No.
S3T 2.5 PE		2902590000

Type	Qty.	Order No.
SEP 3T 2.5		2902630000
SEP 3T 2.5 BL		2902640000
AEB 35 SC/1	50	1991920000
AEB 35 SCL/1 V0	20	2661280000
ATPG 1.5-10 L	0.2 A 50	1991890000
ATPG 2.5 MHR	0.2 A 50	1991960000
PS 2.0 MC	20	0310000000
SDIL 0,6X3,5X100	1	2749140000
DEK 5/5 PLUS MC NE WS	1000	1854490000
DEK 5/5 MM WS	800	2007110000
WS 8/5 MM WS	800	2007150000
WS 10/5 M PLUS MC NE WS	600	2003770000
SNAPMARK I	50	1805880000


SFS 4 2C BK

4 mm<sup>2</sup>



Width/Height/Depth	mm
max. current / max. cond. cross-section	A/mm <sup>2</sup>
Max. clamping range	mm <sup>2</sup>

6.1 x 67.7 x 79.1  
**6.3 / 4**  
**0.75...4**



### Technical data

Rated data	
Rated voltage to adjoining terminal	V
Rated current for wire cross-section	A mm <sup>2</sup>
Short Circuit Current Rating (SCCR)	
Rated impulse withstand voltage / Pollution severity	
Gauge to IEC 60947-1 / UL 94 flammability rating	
Approvals	
Clamped conductors	
Solid / Stranded	mm <sup>2</sup>
Flexible / Flexible with ferrule	mm <sup>2</sup>
Stripping length / Blade size	

IEC	UL	CSA	EN 60079-7
500			
6.3			
4			
		10kA	
		4 kV / 3	
		A4 / V-0	



Rated connection	
0.75...4 / 0.75...4	
0.75...4 / 0.75...4	
12 / 0.6 x 3.5 mm	

### Note

### Ordering data

Version	
500 V AC/DC, without LED	
10-36 V AC/DC, with LED	
30-70 V AC/DC, with LED	
60-150 V AC/DC, with LED	
100 - 250 V AC/DC, with LED	

Note

Type	Qty.	Order No.
SFS 4 2C BK		2941480000
SFS 4 2C 10-36V BK		2941490000
SFS 4 2C 30-70V BK		2941500000
SFS 4 2C 60-150V BK		2941510000
SFS 4 2C 100-250V BK		2941520000

### Accessories

Plug-in cross-connection	2-pole 10-pole
End plate	dark beige
Test plug	
Terminal blocks identical in contour	
Screwdriver	Standard
Marking tags	

Type	Qty.	Order No.
ZQV 4N/2	32 A 60	1527930000
ZQV 4N/10	32 A 20	1528090000
SEP 3C 4	20	2874800000
PS 2.0 MC	20	0310000000
A3C 4	32 A 50	2051240000
A3C 4 PE	50	2051410000
SDIL 0,6X3,5X100	1	2749140000
DEK 5/6 PLUS MC NE WS	1000	1011320000
WS 10/6 M PLUS MC NE WS	600	2003780000
DEK 5/6 MM WS	600	2007120000
WS 8/6 MM WS	600	2007160000
G 20/0.25A/F	0.25 A 10	0430500000
G 20/0.50A/F	0.5 A 10	0430600000
G 20/1.00A/F	1 A 10	0430700000
G 20/2.00A/F	2 A 10	0430900000

### G-fuse cartridge, 5 x 20 mm (IEC 60127-2)

0.25 A fast
0.50 A fast
1.00 A fast
2.00 A fast


For detailed information on other accessories and application in the online catalogue

## Spring connection with SNAP IN technology (S-Series)

### Test-disconnect terminal blocks

#### SDT 2.5 2C

2.5 mm<sup>2</sup>



Width/Height/Depth	mm
max. current / max. cond. cross-section	A/mm <sup>2</sup>
Max. clamping range	mm <sup>2</sup>

5.1 x 77.5 x 37.65  
**20 / 2.5**  
**0.34...2.5**



#### Technical data

Rated data	
Rated voltage of feed-through terminal	V
Rated current	A
for wire cross-section	mm <sup>2</sup>
Short Circuit Current Rating (SCCR)	
Rated impulse withstand voltage / Pollution severity	
Gauge to IEC 60947-1 / UL 94 flammability rating	
Approvals	
Clamped conductors	
Solid / Stranded	mm <sup>2</sup>
Flexible / Flexible with ferrule	mm <sup>2</sup>
Stripping length / Blade size	mm/-

**Note**

#### Ordering data

Version	
	dark beige
	Blue
	Orange

**Note**


#### Accessories

Plug-in cross-connection	
	2-pole
	10-pole
	2-pole
	10-pole
End plate	
	dark beige
End bracket	
	dark beige, screwable
	dark beige, direct mounting
Test adapter	
	1-pole
	stackable
	3-pole
	5-pole
Test plug	
Screwdriver	
	Standard
Switch lock	
	red
Marking tags	

For detailed information on other accessories and application in the online catalogue


#### SDT 2.5 2C w/o DTLV

2.5 mm<sup>2</sup>



Width/Height/Depth	mm
max. current / max. cond. cross-section	A/mm <sup>2</sup>
Max. clamping range	mm <sup>2</sup>

5.1 x 77.5 x 36.5  
**20 / 2.5**  
**0.34...2.5**



#### Technical data

Rated data	
Rated voltage of feed-through terminal	V
Rated current	A
for wire cross-section	mm <sup>2</sup>
Short Circuit Current Rating (SCCR)	
Rated impulse withstand voltage / Pollution severity	
Gauge to IEC 60947-1 / UL 94 flammability rating	
Approvals	
Clamped conductors	
Solid / Stranded	mm <sup>2</sup>
Flexible / Flexible with ferrule	mm <sup>2</sup>
Stripping length / Blade size	mm/-

**Note**

#### Ordering data

Type	Qty.	Order No.
SDT 2.5 2C W/O DTLV		3016710000
SDT 2.5 2C W/O DTLV BL		2983270000
SDT 2.5 2C W/O DTLV OR		2983260000


**Note**

Type	Qty.	Order No.
ZQV 2.5N/2	24 A 60	1527540000
ZQV 2.5N/10	24 A 20	1527690000
SEP 3C 2.5	20	2751090000
AEB 35 SC/1	50	1991920000
AEB 35 SCL/1 VO	20	2661280000
ATPG 1.5-10 L	0.2 A 50	1991890000
ATPG 2.5 M-R	0.2 A 50	1991960000
ATPG 2.5/3	0.2 A 25	2041190000
ATPG 2.5/5	0.2 A 25	2041180000
PS 2.0 MC	20	0310000000
SDIL 0,6X3,5X100	1	2749140000
DTLE 2.5/4	25	2910530000
DEK 5/5 PLUS MC NE WS	1000	1854490000
DEK 5/5 MM WS	800	2007110000
WS 8/5 MM WS	800	2007150000
WS 10/5 M PLUS MC NE WS	600	2003770000


For detailed information on other accessories and application in the online catalogue

**SDT 2.5 3C**

**2.5 mm<sup>2</sup>**



5.1 x 84.5 x 37.65  
**20 / 2.5**  
**0.34...2.5**



DIN EN 60947-7-1

IEC	UL	CSA	EN 60079-7
500			
24			
2.5			
	10kA		
	6 kV / 3		
	A3 / V-0		




**Rated connection**

0.5...2.5 / 0.5...2.5  
0.5...2.5 / 0.34...2.5  
10 / 0.6 x 3.5 mm

**SDT 2.5 3C w/o DTLV**

**2.5 mm<sup>2</sup>**



5.1 x 84.5 x 36.5  
**20 / 2.5**  
**0.34...2.5**



DIN EN 60947-7-1

IEC	UL	CSA	EN 60079-7
20			
2.5			
	10kA		
	6 kV / 3		
	A3 / V-0		



**Rated connection**

0.5...2.5 / 0.5...2.5  
0.5...2.5 / 0.34...2.5  
10 / 0.6 x 3.5 mm

Type	Qty.	Order No.
SDT 2.5 3C		<b>3016680000</b>
SDT 2.5 3C BL		<b>2974150000</b>
SDT 2.5 3C OR		<b>2974140000</b>

Type	Qty.	Order No.
SDT 2.5 3C W/O DTLV		<b>3016730000</b>
SDT 2.5 3C W/O DTLV BL		<b>2983290000</b>
SDT 2.5 3C W/O DTLV OR		<b>2983280000</b>

Type	Qty.	Order No.
ZQV 2.5N/2	24 A 60	<b>1527540000</b>
ZQV 2.5N/10	24 A 20	<b>1527690000</b>
SEP 4C 2.5	20	<b>2751100000</b>
AEB 35 SC/1	50	<b>1991920000</b>
AEB 35 SCL/1 VO	20	<b>2661280000</b>
ATPG 1.5-10 L	0.2 A 50	<b>1991890000</b>
ATPG 2.5 MI-R	0.2 A 50	<b>1991960000</b>
ATPG 2.5/3	0.2 A 25	<b>2041190000</b>
ATPG 2.5/5	0.2 A 25	<b>2041180000</b>
PS 2.0 MC	20	<b>0310000000</b>
SDIL 0,6X3,5X100	1	<b>2749140000</b>
DTLE 2.5/4	25	<b>2910530000</b>
DEK 5/5 PLUS MC NE WS	1000	<b>1854490000</b>
DEK 5/5 MM WS	800	<b>2007110000</b>
WS 8/5 MM WS	800	<b>2007150000</b>
WS 10/5 M PLUS MC NE WS	600	<b>2003770000</b>


Type	Qty.	Order No.
ZQV 2.5N/2	24 A 60	<b>1527540000</b>
ZQV 2.5N/10	24 A 20	<b>1527690000</b>
SEP 4C 2.5	20	<b>2751100000</b>
AEB 35 SC/1	50	<b>1991920000</b>
AEB 35 SCL/1 VO	20	<b>2661280000</b>
ATPG 1.5-10 L	0.2 A 50	<b>1991890000</b>
ATPG 2.5 MI-R	0.2 A 50	<b>1991960000</b>
ATPG 2.5/3	0.2 A 25	<b>2041190000</b>
ATPG 2.5/5	0.2 A 25	<b>2041180000</b>
PS 2.0 MC	20	<b>0310000000</b>
SDIL 0,6X3,5X100	1	<b>2749140000</b>
DTLE 2.5/4	25	<b>2910530000</b>
DEK 5/5 PLUS MC NE WS	1000	<b>1854490000</b>
DEK 5/5 MM WS	800	<b>2007110000</b>
WS 8/5 MM WS	800	<b>2007150000</b>
WS 10/5 M PLUS MC NE WS	600	<b>2003770000</b>

## Spring connection with SNAP IN technology (S-Series)

### Test-disconnect terminal blocks


#### SDT 2.5 4C

2.5 mm<sup>2</sup>

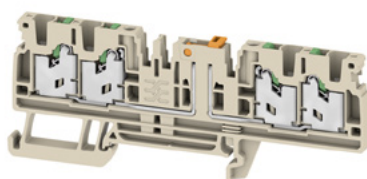

#### SDT 2.5 4C w/o DTLV

2.5 mm<sup>2</sup>

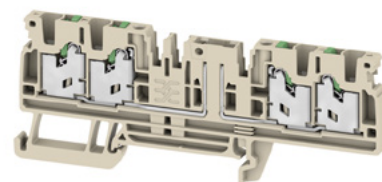

Width/Height/Depth	mm
max. current / max. cond. cross-section	A/mm <sup>2</sup>
Max. clamping range	mm <sup>2</sup>

5.1 x 96 x 37.65	
<b>20 / 2.5</b>	
<b>0.34...2.5</b>	

5.1 x 96 x 36.5	
<b>20 / 2.5</b>	
<b>0.34...2.5</b>	

#### Technical data

Rated data	
Rated voltage of feed-through terminal	V
Rated current	A
for wire cross-section	mm <sup>2</sup>
Short Circuit Current Rating (SCCR)	
Rated impulse withstand voltage / Pollution severity	
Gauge to IEC 60947-1 / UL 94 flammability rating	
Approvals	
Clamped conductors	
Solid / Stranded	mm <sup>2</sup>
Flexible / Flexible with ferrule	mm <sup>2</sup>
Stripping length / Blade size	mm/-

DIN EN 60947-7-1			
IEC	UL	CSA	EN 60079-7
500			
20			
2.5			
	10kA		
	6 kV / 3		
	A3 / V-0		
Rated connection			
0.34...2.5 / 0.5...2.5			
0.34...2.5 / 0.34...2.5			
10 / 0.6 x 3.5 mm			

DIN EN 60947-7-1			
IEC	UL	CSA	EN 60079-7
500			
20			
2.5			
	10kA		
	6 kV / 3		
	A3 / V-0		
Rated connection			
0.5...2.5 / 0.5...2.5			
0.5...2.5 / 0.34...2.5			
10 / 0.6 x 3.5 mm			

Note

#### Ordering data

Version	
	dark beige
	Blue
	Orange

Note

Type	Qty.	Order No.
SDT 2.5 4C		<b>3016700000</b>
SDT 2.5 4C BL		<b>2974170000</b>
SDT 2.5 4C OR		<b>2974160000</b>

Type	Qty.	Order No.
SDT 2.5 4C W/O DTLV		<b>3016740000</b>
SDT 2.5 4C W/O DTLV BL		<b>2983740000</b>
SDT 2.5 4C W/O DTLV OR		<b>2983730000</b>

#### Accessories

Plug-in cross-connection	
	2-pole
	10-pole
	2-pole
	10-pole
End plate	
	dark beige
End bracket	
	dark beige, screwable
	dark beige, direct mounting
Test adapter	
	1-pole
	stackable
	3-pole
	5-pole
Test plug	
Screwdriver	
	Standard
Switch lock	
	red
Marking tags	


Type	Qty.	Order No.
ZQV 2.5N/2	24 A 60	<b>1527540000</b>
ZQV 2.5N/10	24 A 20	<b>1527690000</b>
SEP DT 2.5 4C		<b>2929670000</b>
AEB 35 SC/1	50	<b>1991920000</b>
AEB 35 SCL/1 VO	20	<b>2661280000</b>
ATPG 1.5-10 L	0.2 A 50	<b>1991890000</b>
ATPG 2.5 MI-R	0.2 A 50	<b>1991960000</b>
ATPG 2.5/3	0.2 A 25	<b>2041190000</b>
ATPG 2.5/5	0.2 A 25	<b>2041180000</b>
PS 2.0 MC	20	<b>0310000000</b>
SDIL 0,6X3,5X100	1	<b>2749140000</b>
DTLE 2.5/4	25	<b>2910530000</b>
DEK 5/5 PLUS MC NE WS	1000	<b>1854490000</b>
DEK 5/5 MM WS	800	<b>2007110000</b>
WS 8/5 MM WS	800	<b>2007150000</b>
WS 10/5 M PLUS MC NE WS	600	<b>2003770000</b>

Type	Qty.	Order No.
ZQV 2.5N/2	24 A 60	<b>1527540000</b>
ZQV 2.5N/10	24 A 20	<b>1527690000</b>
SEP DT 2.5 4C		<b>2929670000</b>
AEB 35 SC/1	50	<b>1991920000</b>
AEB 35 SCL/1 VO	20	<b>2661280000</b>
ATPG 1.5-10 L	0.2 A 50	<b>1991890000</b>
ATPG 2.5 MI-R	0.2 A 50	<b>1991960000</b>
ATPG 2.5/3	0.2 A 25	<b>2041190000</b>
ATPG 2.5/5	0.2 A 25	<b>2041180000</b>
PS 2.0 MC	20	<b>0310000000</b>
SDIL 0,6X3,5X100	1	<b>2749140000</b>
DTLE 2.5/4	25	<b>2910530000</b>
DEK 5/5 PLUS MC NE WS	1000	<b>1854490000</b>
DEK 5/5 MM WS	800	<b>2007110000</b>
WS 8/5 MM WS	800	<b>2007150000</b>
WS 10/5 M PLUS MC NE WS	600	<b>2003770000</b>

For detailed information on other accessories and application in the online catalogue

**SDT 4 2C**

**4 mm<sup>2</sup>**



6.1 x 74 x 41  
**20 / 4**  
**0.75...4**



IEC 60947-7-1

IEC	UL	CSA	EN 60079-7
500			
20			
4			
	10kA		
	4 kV / 3		
	A4 / V-0		




**Rated connection**


0.75...4 / 0.75...4  
0.75...4 / 0.75...4  
12 / 0.6 x 3.5 mm

**SDT 4 2C w/o DTLV**

**4 mm<sup>2</sup>**



6.1 x 74 x 41  
**20 / 4**  
**0.75...4**



IEC 60947-7-1

IEC	UL	CSA	EN 60079-7
500			
20			
4			
	10kA		
	4 kV / 3		
	A4 / V-0		



**Rated connection**

0.75...4 / 0.75...4  
0.75...4 / 0.75...4  
12 / 0.6 x 3.5 mm

Type	Qty.	Order No.
SDT 4 2C	1	2941420000
SDT 4 2C BL	50	2941430000
SDT 4 2C OR	50	2941440000





Type	Qty.	Order No.
SDT 4 2C w/o DTLV	50	2941450000
SDT 4 2C w/o DTLV BL	50	2941460000
SDT 4 2C w/o DTLV OR	50	2941470000

Type	Qty.	Order No.
ZQV 4N/2	32 A 60	1527930000
ZQV 4N/10	32 A 20	1528090000
SEP 3C 4	20	2874800000
AEB 35 SC/1	50	1991920000
AEB 35 SCL/1 V0	20	2661280000
ATPG 1.5-10 L	0.2 A 50	1991890000
ATPG 4 M-R	0.2 A 50	1991860000
PS 2.0 MC	20	0310000000
SDIL 0,6X3,5X100	1	2749140000
DTLE 2.5/4	25	2910530000
WS 10/6 M PLUS MC NE WS	600	2003780000
WS 8/6 MM WS	600	2007160000
DEK 5/6 MM WS	600	2007120000
DEK 5/6 PLUS MC NE WS	1000	1011320000

Type	Qty.	Order No.
ZQV 4N/2	32 A 60	1527930000
ZQV 4N/10	32 A 20	1528090000
SEP 3C 4	20	2874800000
AEB 35 SC/1	50	1991920000
AEB 35 SCL/1 V0	20	2661280000
ATPG 1.5-10 L	0.2 A 50	1991890000
ATPG 4 M-R	0.2 A 50	1991860000
PS 2.0 MC	20	0310000000
SDIL 0,6X3,5X100	1	2749140000
DTLE 2.5/4	25	2910530000
WS 10/6 M PLUS MC NE WS	600	2003780000
WS 8/6 MM WS	600	2007160000
DEK 5/6 MM WS	600	2007120000
DEK 5/6 PLUS MC NE WS	1000	1011320000

## Spring connection with SNAP IN technology (S-Series)

### Overview






Type	
2,5 mm <sup>2</sup>	S2C 2.5
	S3C 2.5
	S4C 2.5
4 mm <sup>2</sup>	S2C 4
	S3C 4
	S4C 4

Order no. beige
2674530000
2674540000
2674550000
2874820000
2874840000
2874860000

Order no. blue BL
2753940000
2753950000
2753960000
2874830000
2874850000
2874870000

Order no. orange OR
2875120000
2875130000
2875140000
3023540000
3023550000
3023560000

Order no. red RD
3109200000
3109280000
3109360000
3109440000
3109520000
3109600000





Type	
2,5 mm <sup>2</sup>	S2C 2.5
	S3C 2.5
	S4C 2.5
4 mm <sup>2</sup>	S2C 4
	S3C 4
	S4C 4

Order no. yellow YL
3109230000
3109310000
3109390000
3109470000
3109550000
3109630000

Order no. green GN
3109180000
3109260000
3109340000
3109420000
3109500000
3109580000

Order no. white WT
3109220000
3109300000
3109380000
3109460000
3109540000
3109620000

Order no. black BK
3109160000
3109240000
3109320000
3109400000
3109480000
3109560000



Typ	
2,5 mm <sup>2</sup>	S2C 2.5
	S3C 2.5
	S4C 2.5
4 mm <sup>2</sup>	S2C 4
	S3C 4
	S4C 4

Best.-Nr. licht grau LTGY
3112230000
3112240000
3112250000
3112280000
3112260000
3112270000

Best.-Nr. braun BR
3109170000
3109250000
3109330000
3109410000
3109490000
3109570000

Best.-Nr. violett VT
3109210000
3109290000
3109370000
3109450000
3109530000
3109610000



## **Weidmüller – Your partner in Industrial Connectivity**

As experienced experts we support our customers and partners around the world with products, solutions and services in the industrial environment of power, signal and data. We are at home in their industries and markets and know the technological challenges of tomorrow. We are therefore continuously developing innovative, sustainable and useful solutions for their individual needs. Together we set standards in Industrial Connectivity.

We cannot guarantee that there are no mistakes in the publications or software provided by us to the customer for the purpose of making orders. We try our best to quickly correct errors in our printed media.

All orders are based on our general terms of delivery, which can be reviewed on the websites of our group companies where you place your order. On demand we can also send the general terms of delivery to you.

Weidmüller Interface GmbH & Co. KG  
Klingenbergstraße 26  
32758 Detmold, Germany  
T +49 5231 14-0  
F +49 5231 14-292083  
[www.weidmueller.com](http://www.weidmueller.com)

Personal support can  
be found on our website:  
[www.weidmueller.com/contact](http://www.weidmueller.com/contact)

Made in Germany  
January 2025 / TCTM